

Linear elastic fracture simulation directly from CAD: 2D NURBS-based implementation and role of tip enrichment

X. Peng · E. Atroshchenko · P. Kerfriden ·
S. P. A. Bordas

Received: 18 March 2016 / Accepted: 1 September 2016 / Published online: 30 September 2016
© Springer Science+Business Media Dordrecht 2016

Abstract We propose a method for simulating linear elastic crack growth through an isogeometric boundary element method directly from a CAD model and without any mesh generation. To capture the stress singularity around the crack tip, two methods are compared: (1) a graded knot insertion near crack tip; (2) partition of unity enrichment. A well-established CAD algorithm is adopted to generate smooth crack surfaces as the crack grows. The M integral and J_k integral methods are used for the extraction of stress intensity factors (SIFs). The obtained SIFs and crack paths are compared with other numerical methods.

Keywords Isogeometric analysis · NURBS · Linear elastic fracture · Boundary element method · Crack growth

X. Peng · P. Kerfriden · S. P. A. Bordas
Institute of Mechanics Materials and Advanced
Manufacturing, Cardiff University, Cardiff CF24 3AA, UK

E. Atroshchenko (✉)
Department of Mechanical Engineering, University of
Chile, Santiago 8370448, Chile
e-mail: eatroshch@gmail.com

S. P. A. Bordas
Faculté des Sciences, de la Technologie et de la
Communication, Université du Luxembourg, 6 rue Richard
Coudenhove-Kalergi, Research Unit in Engineering
Science Campus Kirchberg, G 007, 1359 Luxembourg,
Luxembourg

S. P. A. Bordas
University of Western Australia, 35 Stirling Hwy, Crawley, WA
6009, Australia

1 Introduction

Meshing and remeshing is one of the most human interactive task in fracture simulation. Most if not all, commercial codes do not offer completely automatic approach for industrial fracture simulations. The difficulties associated with computational fracture mechanics have various sources. First, given a CAD model of the component, a suitable mesh has to be generated, usually orders of magnitude finer in the region(s) where cracks are introduced, than the mesh used for stress analysis. Second, the discontinuities engendered by the cracks must be followed during crack propagation. Third, the discretization must be able to reproduce the large gradients [singularities in the case of linear elastic fracture mechanics (LEFM)]. This requirement, combined with that of capturing discontinuities as they evolve implies that relatively fine meshes must be continuously regenerated as cracks propagate. Fourth, reliable and general fracture models remain elusive. For LEFM, the Paris law or its cousins are commonly used. Such laws compute the increment in crack advance as a proportional to some power m ($m > 1$) of the stress intensity factor (SIF). A small error ε_{SIF} in the SIF thus leads to an accumulated error scaling as $m\varepsilon_{SIF}$ at each of the tens of thousands of crack growth steps required for each simulation.

Consequently, various approaches have been developed to overcome, or at least alleviate those difficulties as listed in Table 1.

Table 1 Difficulties associated with crack modeling and main remedies, see also [Rabczuk et al. \(2010\)](#)

CAD and Mesh	IGA (Hughes et al. 2005), IGABEM (Simpson et al. 2012 ; Scott et al. 2013), automatic remeshing (Bouchard et al. 2000)
Discontinuities	Meshless (Bordas et al. 2008), XFEM (Moës et al. 1999), BEM (Cisilino and Aliabadi 2004)
Large gradients and singularities	XFEM (Moës et al. 1999), XIGA (Luycker et al. 2011 ; Ghorashi et al. 2012), cohesive IGA (Nguyen et al. 2014)
Models and error	XFEM error estimators (Duflo and Bordas 2008 ; Bordas and Duflo 2007), XSPR (González-Estrada et al. 2014 ; Ródenas et al. 2008) Homogenization and multiscale fracture modeling (Goury 2015 ; Akbari Rahimabadi 2014)

The boundary element method (BEM) has been applied for simulating fracture problems for several decades due to the fact that (1) the governing equations are accurately satisfied in the domain interior with the use of fundamental solution and the discretization of the geometry and approximation of the quantities of interest only occur over the boundary. BEM is in particular able to capture the stress concentration or singularity better than domain integration methods such as the finite element method (FEM) ([Becker 1992](#)); (2) the dimensionality of the problem in BEM is reduced by one and only the boundary geometry and discretization must be modified when cracks evolve, which simplifies the remeshing procedure. An important issue for modeling fracture using BEM is the degeneration of the system matrix when the source points are placed on overlapping crack surfaces. Much work was done to address this problem. [Blandford et al. \(1981\)](#) used the multi-region method to model crack problems by dividing the domain into sub-domains along the crack surface and introducing artificial boundaries. This approach is cumbersome in dealing with multiple cracks and crack propagation problems. [Snyder and Cruse \(1975\)](#) developed a modified fundamental kernel for infinite domains containing flat, traction free cracks in a 2D mixed-mode problem. However, the proposed kernel is limited to flat cracks. The most popular approach to overcome the degeneration of the system is to prescribe displacement boundary integral equation (BIE) on one crack surface and traction BIE on the other crack surface. The method is called dual boundary element method (DBEM) ([Hong and Chen 1988](#)). DBEM provides an efficient way to model cracks of arbitrary 1D and 2D geometries ([Portela et al. 1992a](#); [Mi and Aliabadi 1992](#); [Cisilino and Aliabadi 2004](#); [Portela 2011](#)).

Another approach is known as the displacement discontinuity method (DDM) ([Crouch 1976](#)), which is mostly suitable for problems with symmetry. In this method, the two overlapping crack surfaces are replaced by one of the surfaces, which decreases the computational model size. Also the displacement and traction discontinuities on the crack surface are used as primary quantities instead of displacement and traction on the two crack surfaces in DBEM. In such a case, even a single traction BIE can be used for fracture problems ([Dominguez and Ariza 2000](#)). DDM was later proved to be a special case of DBEM by [Partheymüller et al. \(2000\)](#), who also extended the application of DDM from symmetric loaded cracks to asymmetric loaded cracks. However the displacement field on the crack surface is indirect since only displacement discontinuity is obtained. Additional postprocessing needs to be done to retrieve the displacement solution which increases the implementation complexity and the computational burden.

Another branch of work has focused on the Galerkin formulation of BEM, particularly symmetric Galerkin BEM (SGBEM), for fracture mechanics, which is primarily based on DDM ([Li et al. 1998](#); [Frangi 2002](#); [Sutradhar and Paulino 2004](#)). In Galerkin formulations, the error estimation theory is well developed and the boundary continuity requirement is relaxed to be C^0 for hyper-singular BIE due to the weak form ([Bonnet et al. 1998](#)). However, double integrals must be evaluated which makes the method slower but also more stable than the collocation BEM. In order to make the crack modeling more efficient for large scale problems, hybrid BEM-FEM schemes were proposed ([Nikishkov et al. 2001](#); [Aour et al. 2007](#); [Dong and Atluri 2013](#)). The general idea is to subdivide the cracked

domain into two sub-domains, the BEM sub-domain and the FEM sub-domain, to take advantage of both methods. Some other methods like boundary element-free method (Liew et al. 2007) and the scaled boundary finite element method (SBFEM) (Natarajan and Song 2013) were also proposed and applied to fracture modeling.

The accurate evaluation of stress intensity factors (SIFs) plays a pivotal role in crack growth modeling. Due to the $1/\sqrt{r}$ stress singularity in the vicinity of the crack tip, special care should be taken in the numerical methods in order to absolutely obtain more accurate SIFs. One approach to capture the asymptotics of the displacement and stress fields in the vicinity of a crack is the use of special crack tip elements; for example, quarter-point elements (Henshell and Shaw 1975; Mi and Aliabadi 1994), which can exactly represent the $1/\sqrt{r}$ singularity in the near-tip stress field and allow a direct extraction of the SIFs (Martinez and Dominguez 1984). Another possibility is the hybrid crack element, developed in both the FEM and the BEM communities (Karihaloo and Xiao 2001; Zamani and Sun 1993), which introduces asymptotic behavior of the stress field around crack tip into the tip-element so that the SIFs can be computed directly and accurately.

The virtual crack closure technique (VCCT) based on the Irwin's integral of strain energy release rates, is a common method to extract SIFs in both the FEM and the BEM, and has recently been extended to extended finite element method (XFEM) and extended element-free Galerkin method (XEFG) (Lan et al. 2013; Muthu et al. 2014). Since the near-tip singular behavior is already known as Williams' solution, the idea is to remove the singularity and extract the SIFs directly (Portela et al. 1992b). However, the Williams' solution is only valid in the 'near-tip' region. The determination of this 'near-tip' region for simulation is ambiguous in practical problems.

J integral based methods are regarded as very accurate approaches to extract SIFs in both FEM and BEM communities. Different approaches to the extraction of J_1 (J) were developed, such as the symmetric and asymmetric decomposition of J_1 (Rigby and Aliabadi 1998) and the M integral (interaction energy integral) (Yau et al. 1980). Chang and Wu (2007) proposed the J_k method which does not require any auxiliary fields and is suitable for both flat and curved cracks. We note that in the implementation of FEM/XFEM and other domain type methods, these contour inte-

grals are always cast into domain integrals since the FEM solutions and the related quantities (in particular stresses) are known inside the domain (Shivakumar and Raju 1992; Gosz and Moran 2002; Moës et al. 1999). However, in BEM it is easier to deal with contour integrals, since obtaining solutions inside the domain requires additional integration. While evaluating J_k and M integrals along the crack surfaces is done directly and straightforwardly due to the boundary nature of BEM solutions. The latter two contour integral methods, namely J_k and M integrals are discussed in detail in this paper.

The isogeometric analysis (IGA) (Hughes et al. 2005) has been proposed as an alternative methodology to the traditional Lagrange polynomial based analyses. The IGA utilizes the same splines, that are used to exactly represent the geometry, as basis functions for the approximation of the unknown fields, which builds up a more direct link between CAD and analysis. Non-uniform rational B-splines (NURBS) based IGA has been widely investigated in many areas (Akkerman et al. 2008; Bazilevs et al. 2006; Auricchio et al. 2010a; Benson et al. 2010; Borden et al. 2012). More flexible geometrical representation techniques, such as T-splines (Bazilevs et al. 2010; Scott et al. 2012), PHT splines (Deng et al. 2008) and LR Splines (Dokken et al. 2013) etc., have been introduced to overcome the major difficulty of NURBS, i.e. the lack of local refinement due to its tensor product structure. Recently the IGA has been incorporated with BEM [namely the isogeometric BEM (IGABEM)] and applied to exterior potential-flow problems (Politis et al. 2009), potential problems (Gu et al. 2012), elastostatics (Simpson et al. 2012; Scott et al. 2013), shape optimization (Li and Qian 2011), Stokes flow (Heltai et al. 2012) and acoustic (Peake et al. 2013; Simpson et al. 2013) etc. More recently, IGABEM has been investigated with trimmed NURBS geometry (Wang et al. 2015; Beer et al. 2015) and a posteriori error estimator is proposed for adaptive IGABEM (Feischl et al. 2015). A fast IGABEM solver has been developed in Marussig et al. (2015).

The IGABEM presents another way for isogeometric analysis due to the natural fit between the two methods. Currently, the dominated CAD geometry only provides surface description by smooth splines. This is in consistence with the basic feature of the BEM since only the unknown fields (displacement and traction) along the boundary is required to approximate. And the

convergence of collocation BEM with splines has been investigated which forms a solid basis for the combined methodology (Arnold and Saranen 1984; Juhl 1998) and latest work can be referred in Taus et al. (2015). In this paper, a new application of IGABEM is discussed in detail for linear elastic fracture problems. It should be noted that knot insertion in B-splines can introduce discontinuities in the geometry, which makes it possible to extend IGA to fracture mechanics (Verhoosel et al. 2011; Nguyen et al. 2014). The higher order continuity provided by splines also enables a more straightforward expression of the traction BIE for crack modeling. This paper presents a basic scheme for fracture modeling and crack propagation in 2D domains.

The paper is organized as follows: The concept of NURBS is reviewed shortly in Sect. 2. The basics of the DBEM for fracture modeling are briefly reviewed in Sect. 3, and more details follow, including collocation and singular integration in DBEM. Section 4 details the approaches developed for extraction of the SIFs, based on the M integral and the J_k integral. Section 5 outlines a modified NURBS approach to simulate crack growth using NURBS based representation for cracks. Numerical examples are shown both for fracture analysis and crack propagation, in comparison with other popular methods such as SGBEM, XFEM and XEFG.

2 NURBS basis functions

NURBS basis functions are the generalization of B-spline functions that allows a ‘projection’ from square and cubic domains to form complex geometries. So the basic concept of B-spline is first outlined. B-spline basis functions are defined over a knot vector, which is a non-decreasing sequence of real numbers given in the parameter space. A knot vector is denoted as $\Xi = \{\xi_1, \xi_2, \dots, \xi_{n+p+1}\}$, where $\xi_A \in \mathbb{R}$ is the A^{th} parameter coordinate (knot), p is the order of the polynomial in B-spline basis functions, n is the number of the basis functions. For a given order p , the B-spline basis functions $N_{A,p}$ with $1 \leq a \leq n$ are defined by the Cox-de Boor recursion:

$$N_{A,0}(\xi) = \begin{cases} 1 & \xi_A \leq \xi < \xi_{A+1} \\ 0 & \text{otherwise,} \end{cases} \quad (1)$$

then, for $p > 0$,

$$N_{A,p}(\xi) = \frac{\xi - \xi_A}{\xi_{A+p} - \xi_A} N_{A,p-1}(\xi) + \frac{\xi_{A+p+1} - \xi}{\xi_{A+p+1} - \xi_{A+1}} N_{A+1,p-1}(\xi). \quad (2)$$

The continuity of B-spline basis functions at ξ_A can be decreased by repeating the knot several times. If ξ_A has multiplicity k ($\xi_A = \xi_{A+1} = \dots = \xi_{A+k-1}$), then the basis functions are C^{p-k} continuous at ξ_A . Particularly, when $k = p$, the basis is C^0 and $k = p+1$ leads to a discontinuity at ξ_A . If the first and last knot have $k = p+1$, the knot vector is called an open knot vector. More details can be referred in Piegl and Tiller (1995).

Having defined the B-spline basis functions $\mathbf{N} = \{N_{A,p}\}_{A=1}^n$, we can describe a curve $C(\xi)$ in \mathbb{R}^{d_s} (d_s is the spatial dimensionality, $d_s = 2$ in this paper) by a group of control points $\mathbf{P} = \{P_A\}_{A=1}^n$ with them as:

$$C(\xi) = \sum_{A=1}^n P_A N_{A,p}(\xi). \quad (3)$$

A NURBS curve is defined in the same way but by replacing the B-spline basis functions by NURBS basis functions. For example, a NURBS curve $C(\xi)$ can be described as:

$$C(\xi) = \sum_{A=1}^n P_A R_{A,p}(\xi), \quad (4)$$

where $R_{A,p}$ are the NURBS basis functions, which are defined as

$$R_{A,p}(\xi) = \frac{\omega_A N_{A,p}(\xi)}{\sum_{B=1}^n \omega_B N_{B,p}(\xi)}. \quad (5)$$

ω_B is the weight associated with the B th control point. Note that $R_{A,p}$ is only non-zero on the knot interval $[\xi_a, \xi_b]$ defined by $p+1$ control points.

3 Isogeometric DBEM for fracture modeling

3.1 Problem formulation

Consider an arbitrary domain Ω which contains a crack as in Fig. 1. The boundary Γ is composed of Γ_u where Dirichlet boundary conditions are prescribed (known

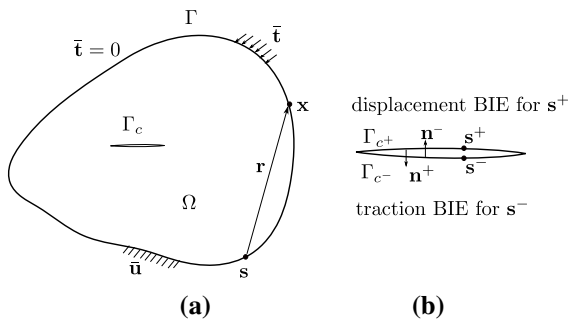


Fig. 1 Crack model

displacement $\bar{\mathbf{u}}$), Γ_t where Neumann boundary conditions are prescribed (known traction $\bar{\mathbf{t}}$). The remaining part of the boundary is assumed to be traction free. The crack Γ_c is composed of two coincident faces: Γ_{c+} and Γ_{c-} is assumed also traction free. $\mathbf{s} = (s_1, s_2)$ denotes the source point and $\mathbf{x} = (x_1, x_2)$ the field point. The displacement BIE at source point \mathbf{s} is given by finding $\mathbf{u}, \mathbf{t} : \Omega \rightarrow \mathbb{R}^2$ such that

$$c_{ij}(\mathbf{s})u_j(\mathbf{s}) + \int_{\Gamma} T_{ij}(\mathbf{s}, \mathbf{x})u_j(\mathbf{x})d\Gamma(\mathbf{x}) = \int_{\Gamma} U_{ij}(\mathbf{s}, \mathbf{x})t_j(\mathbf{x})d\Gamma(\mathbf{x}), \tag{6}$$

where the U_{ij}, T_{ij} are called fundamental solutions and for linear elasticity, given by

$$U_{ij}(\mathbf{s}, \mathbf{x}) = \frac{1}{8\pi\mu(1-\nu)} \left[(3-4\nu)\delta_{ij}\ln\left(\frac{1}{r}\right) + r_{,i}r_{,j} \right], \tag{7}$$

$$T_{ij}(\mathbf{s}, \mathbf{x}) = -\frac{1}{4\pi(1-\nu)r} \left\{ \frac{\partial r}{\partial n} [(1-2\nu)\delta_{ij} + 2r_{,i}r_{,j}] - (1-2\nu)(r_{,i}n_j - r_{,j}n_i) \right\}, \tag{8}$$

for 2D under plane strain conditions, where $\mu = E/[2(1 + \nu)]$, E is Young’s Modulus and ν Poisson’s ratio. Components T_{ij} exhibit a singularity of $O(1/r)$ and the sign f implies that the corresponding integrals are understood in the sense of the Cauchy Principal Value, $|\mathbf{r}| = |\mathbf{x} - \mathbf{s}|$. and U_{ij} is weakly-singular (of order $O(\ln(1/r))$).

The idea of the boundary element method is to discretize the boundary geometry and the physical fields using sets of basis functions. Subsequently, the source point is placed at the collocation points and the displacement BIE (6) is transformed into a corresponding system of linear algebraic equations. However, when the domain contains a crack, the collocation points on

the overlapping surfaces (refer to Fig. 1b) Γ_{c+} coincide with Γ_{c-} and the system matrix becomes singular. This difficulty is overcome in dual boundary element methods by prescribing the traction BIE on one of the crack faces (Γ_{c-} in Fig. 1b), and the displacement BIE on the other crack surface (Γ_{c+}) and on the rest of the boundary Γ . The traction BIE is obtained by differentiation of the displacement BIE with respect to \mathbf{s} and multiplication by the elastic tensor E_{ijkl} :

$$c_{ij}(\mathbf{s})t_j(\mathbf{s}) + \int_{\Gamma} S_{ij}(\mathbf{s}, \mathbf{x})u_j(\mathbf{x})d\Gamma(\mathbf{x}) = \int_{\Gamma} K_{ij}(\mathbf{s}, \mathbf{x})t_j(\mathbf{x})d\Gamma(\mathbf{x}), \tag{9}$$

$$S_{ij}(\mathbf{s}, \mathbf{x}) = E_{ikpq} \frac{\partial T_{pj}(\mathbf{s}, \mathbf{x})}{\partial s_q} n_k(\mathbf{s}),$$

$$K_{ij}(\mathbf{s}, \mathbf{x}) = E_{ikpq} \frac{\partial U_{pj}(\mathbf{s}, \mathbf{x})}{\partial s_q} n_k(\mathbf{s}), \tag{10}$$

where S_{ij} is the hypersingular kernel ($O(1/r^2)$) and the sign f denotes the Hadamard finite part integrals and K_{ij} is of order $O(1/r)$. The fundamental solutions for the traction BIE are detailed in Appendix 1. $c_{ij}(\mathbf{s}) = 0.5\delta_{ij}$ when the source point \mathbf{s} is on a smooth boundary.

3.2 NURBS discretization of the boundary integral equations


In the NURBS based isogeometric concept, the physical field is approximated by the same NURBS basis functions as those used to describe the geometry $\Gamma = C(\xi)$. The displacement and traction fields can be approximated as follows:

$$u_i(\xi) = \sum_{A=1}^n R_{A,p}(\xi)d_i^A, \tag{11}$$

$$t_i(\xi) = \sum_{A=1}^n R_{A,p}(\xi)q_i^A, \tag{12}$$

We define an element in the parameter space as an interval between two consecutive non-repeated knots $[\xi_a, \xi_b]$ and linearly map it to interval $[-1, 1]$, which is called the parent space (Hughes et al. 2005) and the number of elements is N_e . We define $\hat{\xi}$ as the parent coordinate of the field point \mathbf{x} in $[-1, 1]$, $\hat{\xi}_s$ as the parent coordinate of the source point \mathbf{s} in $[-1, 1]$, and $J(\hat{\xi})$ is the Jacobian transformation from physical to parent space. The transformation process for one NURBS

Fig. 2 Coordinate system in IGABEM: **a** the element containing collocation point \mathbf{s} in the global space; **b** the parametric space and parent space

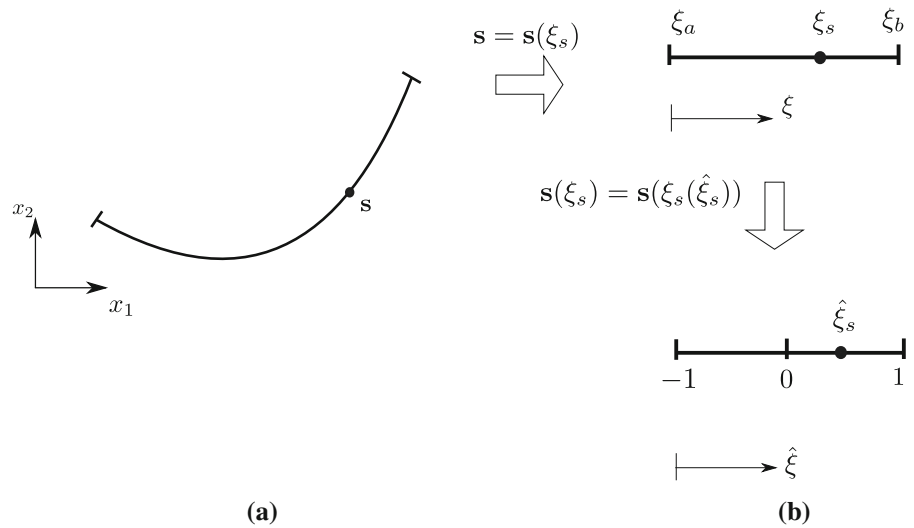

element (the knot interval $[\xi_a, \xi_b]$) to the parent space $[-1, 1]$ is shown in Fig. 2. And we have

$$\xi = \xi(\hat{\xi}) = \frac{(\xi_b - \xi_a)\hat{\xi} + (\xi_b + \xi_a)}{2},$$

$$J(\hat{\xi}) = \frac{d\Gamma}{d\xi} \frac{d\xi}{d\hat{\xi}}. \quad (13)$$

Then the above form can also be written via the elemental approximation as:

$$u_i(\hat{\xi}) = \sum_{l=1}^{p+1} N_l(\hat{\xi}) d_l^I, \quad (14)$$

$$t_i(\hat{\xi}) = \sum_{l=1}^{p+1} N_l(\hat{\xi}) q_l^I, \quad (15)$$

where

$$N_I(\hat{\xi}) = R_{A,p}(\xi). \quad (16)$$

And d_i, q_i are displacement and traction control variables respectively. The relation between the local index I and the global index A is given by the element connectivity (Simpson et al. 2012). Substituting the discretized displacements and tractions into the BIEs will give,

$$\sum_{l=1}^{p+1} C_{ij}^I(\mathbf{s}) d_j^l + \sum_{e=1}^{N_e} \sum_{l=1}^{p+1} T_{ij}^l d_j^l = \sum_{e=1}^{N_e} \sum_{l=1}^{p+1} U_{ij}^l q_j^l, \quad (17)$$

$$\sum_{l=1}^{p+1} C_{ij}^I(\mathbf{s}) t_j^l + \sum_{e=1}^{N_e} \sum_{l=1}^{p+1} S_{ij}^l d_j^l = \sum_{e=1}^{N_e} \sum_{l=1}^{p+1} K_{ij}^l q_j^l, \quad (18)$$

where the jump term and integrals of the fundamental solutions are respectively written as:

$$C_{ij}^I(\mathbf{s}) = c_{ij} N_I(\hat{\xi}_s), \quad (19)$$

$$T_{ij}^l = \int_{-1}^1 T_{ij}(\mathbf{s}, \mathbf{x}(\hat{\xi})) N_I(\hat{\xi}) J(\hat{\xi}) d\hat{\xi}, \quad (20)$$

$$U_{ij}^l = \int_{-1}^1 U_{ij}(\mathbf{s}, \mathbf{x}(\hat{\xi})) N_I(\hat{\xi}) J(\hat{\xi}) d\hat{\xi}, \quad (21)$$

$$S_{ij}^l = \int_{-1}^1 S_{ij}(\mathbf{s}, \mathbf{x}(\hat{\xi})) N_I(\hat{\xi}) J(\hat{\xi}) d\hat{\xi}, \quad (22)$$

$$K_{ij}^l = \int_{-1}^1 K_{ij}(\mathbf{s}, \mathbf{x}(\hat{\xi})) N_I(\hat{\xi}) J(\hat{\xi}) d\hat{\xi}. \quad (23)$$

3.3 Treatment of singular integrals

Integrating the weakly-singular, strongly-singular and hyper-singular kernels in Eqs. (20)–(23) is a major difficulty in BEM. In the present work, weakly-singular integrals are evaluated using Telles' transformation (Telles 1987). Strongly-singular integrals in Eq. (6) are treated in two different ways. In the first approach,

the singularity in T_{ij} is removed by the regularization method, based on use of simple solutions (Rudolphi 1991; Liu and Rudolphi 1991), i.e. the rigid body motions, which satisfy Eq. (6) with zero tractions. Adding and subtracting term $\mathbf{u}(\mathbf{s})$ in Eq. (6), the strongly-singular equation can be transformed into the regularized form:

$$\int_{\Gamma} T_{ij}(\mathbf{s}, \mathbf{x})(u_j(\mathbf{x}) - u_j(\mathbf{s}))d\Gamma(\mathbf{x}) = \int_{\Gamma} U_{ij}(\mathbf{s}, \mathbf{x})t_j(\mathbf{x})d\Gamma(\mathbf{x}). \tag{24}$$

After discretization, Eq. (24) becomes

$$\sum_{e=1}^{N_e} \sum_{l=1}^{p+1} P_{ij}^l d_j^l = \sum_{e=1}^{N_e} \sum_{l=1}^{p+1} U_{ij}^l q_j^l, \tag{25}$$

where

$$P_{ij}^l = \int_{-1}^1 T_{ij}(\mathbf{s}, \mathbf{x}(\hat{\xi})) (N_l(\hat{\xi}) - N_l(\hat{\xi}_s)) J(\hat{\xi}) d\hat{\xi}. \tag{26}$$

The implementation of Eq. (24) is simple and does not require calculation of jump term $c_{ij}(\mathbf{s})$. However, when Eq. (24) is used at coincident points on crack surfaces, the singularity corresponding to only one of the points is removed. There have been many attempts to overcome this difficulty. For example, creating artificial integration surfaces, excluding the second singular point (Lutz et al. 1992; Mukherjee et al. 1999) is a possibility. However, the creation and evaluation along the artificial surface is expensive computationally (Tanaka et al. 1994) and is particularly cumbersome to deal with in the framework of isogeometric analysis. Therefore, in the present work, Eq. (24) is used only on the non-cracked boundary, while on crack surfaces, the approach, known as the singularity subtraction technique (SST), is used (Guiggiani et al. 1992). SST is applied to both strongly-singular and hyper-singular integrals after the parametrization in the parent space (Eqs. 20, 22 and 23). The essential idea of the method is to expand the production of the kernel function, the shape function and the Jacobian $J(\hat{\xi})$ into Taylor series in the vicinity of the collocation point, and split the integrands into regular and singular parts. Then the singular terms can be evaluated analytically, while for regular terms standard Gauss quadrature is sufficient. Take the hyper-singular integral term S_{ij}^e as an example:

$$S_{ij}^e = \int_{-1}^1 S_{ij}(\mathbf{s}, \mathbf{x}(\hat{\xi})) N_I(\hat{\xi}) J(\hat{\xi}) d\hat{\xi} = \int_{-1}^1 F(\hat{\xi}_s, \hat{\xi}) d\hat{\xi}. \tag{27}$$

The function $F(\hat{\xi}_s, \hat{\xi})$ can be expanded as:

$$F(\hat{\xi}_s, \hat{\xi}) = \frac{F_{-2}(\hat{\xi}_s)}{\delta^2} + \frac{F_{-1}(\hat{\xi}_s)}{\delta} + O(1), \tag{28}$$

where $\delta = \hat{\xi} - \hat{\xi}_s$. The details to obtain F_{-2} and F_{-1} with a NURBS basis are given in Appendix 1 and are studied in detail in Guiggiani et al. (1992), Simpson and Trevelyan (2011). The final form of (27) is given by:

$$\int_{-1}^1 F(\hat{\xi}_s, \hat{\xi}) d\hat{\xi} = \int_{-1}^1 \left(F(\hat{\xi}_s, \hat{\xi}) - \frac{F_{-2}(\hat{\xi}_s)}{\delta^2} - \frac{F_{-1}(\hat{\xi}_s)}{\delta} \right) d\hat{\xi} + F_{-2}(\hat{\xi}_s) \left(-\frac{1}{1-\hat{\xi}_s} + \frac{1}{-1-\hat{\xi}_s} \right) + F_{-1}(\hat{\xi}_s) \ln \left| \frac{1-\hat{\xi}_s}{-1-\hat{\xi}_s} \right|. \tag{29}$$

The first integral in (29) is regular and it is evaluated using standard Gaussian quadrature.

3.4 Partition of unity enrichment formulation

The partition of unity (PU) enrichment method (Melenk and Babuška 1996) has been well studied in FEM to model problems with *a priori* knowledge about the solution. See Sukumar et al. (2008), Moës et al. (2002), Gravouil et al. (2002) for application of XFEM to 3D crack propagation and Bordas and Moran (2006), Bordas et al. (2007), Wyart et al. (2008) for industrial damage tolerance assessment using XFEM. It was also shown in the literature that the accuracy of the stress intensity factors for 3D linear elastic fracture mechanics was insufficient for coarse meshes and always oscillatory. A posteriori error estimate were derived (Ródenas et al. 2008; Bordas and Duflo 2007; Duflo and Bordas 2008; González-Estrada et al. 2011) and implemented within the commercial software Morfeo to control the discretization error (Bordas and Duflo 2007; Duflo and Bordas 2008).

The approximation of the primary field by PU enrichment is decomposed by two parts: a regular part and an enriched part. The latter allows the approximation to reproduce specific information on the solution through additional degrees of freedom. And the

enrichment idea has been introduced within BEM as well (Liew et al. 2007; Peake et al. 2013). Simpson and Trevelyan (2011) first proposed the idea of enrichment in BEM to capture the stress singularity around the crack tip. The enriched displacement approximation with a NURBS basis writes:

$$u_i(\mathbf{x}) = \sum_{I \in \mathcal{N}_I} N_I(\mathbf{x}) d_i^I + \sum_{J \in \mathcal{N}_J} N_J(\mathbf{x}) \sum_{l=1}^4 \phi_l(\mathbf{x}) a_i^J, \quad (30)$$

where d_i^I are the regular DOFs. a_i^J are the crack tip enriched DOFs. See Bordas et al. (2007) for implementation details in an XFEM framework. Since in BEM the crack is explicitly modeled by two overlapping surfaces, the Heaviside enrichment is not required. \mathcal{N}_I and \mathcal{N}_J are the collections of regular control points and enriched control points, respectively. The crack tip enrichment functions are defined as:

$$\{\phi_l(r, \theta), l = 1, 4\} = \left\{ \sqrt{r} \sin \frac{\theta}{2}, \sqrt{r} \cos \frac{\theta}{2}, \sqrt{r} \sin \frac{\theta}{2} \sin \theta, \sqrt{r} \cos \frac{\theta}{2} \sin \theta \right\}, \quad (31)$$

where (r, θ) are the polar coordinates associated with the crack tip. If the enrichment is done in a small vicinity of the crack tip, where the crack can be regarded as a straight line, i.e. in Eq. (31) angle $\theta = \pm\pi$ and the set of four crack tip enrichment functions can be reduced to one, i.e. $\phi(r) = \sqrt{r}$. Then Eq. (32) results in:

$$u_i(\mathbf{x}) = \sum_{I \in \mathcal{N}_I} N_I(\mathbf{x}) d_i^I + \sum_{J \in \mathcal{N}_J} N_J(\mathbf{x}) \phi(\mathbf{x}) a_i^J. \quad (32)$$

Substituting the above equation into (6) and (9) and discretizing with a NURBS basis, the enriched displacement and traction boundary integral equations can be obtained, respectively:

$$\begin{aligned} & \sum_I^{p+1} C_{ij}^I(\mathbf{s}) (d_j^I + \phi(\mathbf{s}) a_j^I) + \sum_{e=1}^{N_e} \sum_I^{p+1} (T_{ij}^I d_j^I + T_{ij}^I \phi a_j^I) \\ & = \sum_{e=1}^{N_e} \sum_I^{p+1} U_{ij}^I q_j^I, \end{aligned} \quad (33)$$

$$\begin{aligned} & \sum_I^{p+1} C_{ij}^I(\mathbf{s}) t_j^I + \sum_{e=1}^{N_e} \sum_I^{p+1} (S_{ij}^I d_j^I + S_{ij}^I \phi a_j^I) \\ & = \sum_{e=1}^{N_e} \sum_I^{p+1} K_{ij}^I q_j^I. \end{aligned} \quad (34)$$

Note that topological enrichment is used, i.e. only the elements containing the crack tip are enriched, the enrichment terms do not need to be computed for unenriched elements. Differing from Simpson and Trevelyan (2011) where the discontinuous quadratic Lagrange elements are enriched, the enrichment for the NURBS basis will lead to blending elements due to the continuity of the basis. The singular integration for enriched elements can be done with SST as in Sect. 3.3 as long as the local expansion for $\phi(r) = \sqrt{r}$ at the collocation point with respect to intrinsic coordinate is written explicitly.


3.5 Continuity requirements and collocation strategy

Methods for evaluating strongly-singular and hyper-singular integrals (20), (22), (23), described above, are implicitly or explicitly based on Taylor expansions of the integrands in the vicinity of the collocation point. Since the essential feature of the isogeometric approach is to represent displacements, tractions and the geometry using the same NURBS basis functions, special attention should be paid to the continuity of NURBS basis functions at the collocation points where the Taylor series are expanded.

In the classical boundary element method a common way to guarantee the existence of integrals in (20), (22), (23) is by the so-called discontinuous quadratic Lagrange elements (Portela et al. 1992a), i.e. placing collocation points inside an element, where the quadratic polynomials are C^∞ continuous. The same approach can be implemented with NURBS parametrization, since inside the elements NURBS basis functions are infinitely smooth, i.e. the SST can be used directly to treat all singularities. In Fig. 3a, b examples of boundary discretization are shown for classical BEM and IGABEM respectively, where the collocation points in IGA are generated by Greville abscissae (Auricchio et al. 2010b) and the collocation points are moved inside the elements when higher order continuity is necessary.

For the enrichment formulation, since enriched DOFs are introduced, additional source points need to be collocated to balance the number of system unknowns. The location of the source points plays an important role in the condition number of the BEM system matrix. It reveals that for crack tip enrichment, when the additional collocation points are inside

Fig. 3 Mesh discretization for a mode I crack: **a** discontinuous Lagrange element ($p = 2$), **b** NURBS ($p = 2$)

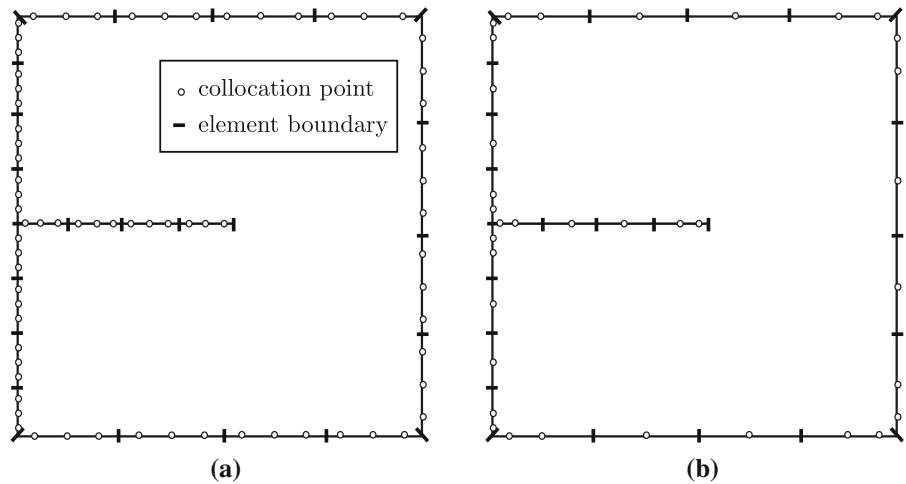

the enriched element, the system condition remains small and gives accurate solutions (see [Simpson and Trevelyan \(2011\)](#) for more details). Nevertheless, the specific location inside the crack tip element has little influence on the final results. Hence in this work, the additional source points are inserted within the crack tip element and spread uniformly between the original collocation points. Figure (4) illustrates the scheme applied in this paper for collocation on the crack surface.

However, the classical theory of boundary integral equations admits much weaker continuity requirements, i.e. the Cauchy and Hadamard integrals exist for $C^{1,\alpha}(\Gamma)$ ($0 < \alpha < 1$) density functions (known as Hölder continuous) ([Martin and Rizzo 1996](#)). Therefore, strongly singular and hyper-singular equations, and all the more so the regularized equation (24), can be used at collocation points located at the edges of the elements in IGABEM, provided that the NURBS basis is sufficiently smooth. However, optimal collocation strategies remain the subject of further research, and require more detailed theoretical and numerical studies.

4 Evaluation of stress intensity factors

4.1 J_k -integral

In this section, two different kinds of J integral based methods for the extraction of SIFs are briefly reviewed. The first one is the J_k method proposed in [Chang and Wu \(2007\)](#), which is the more general case of the J integral. The definition of the J_k in 2D is given as:

$$\begin{aligned}
 J_k &:= \lim_{\Gamma_\epsilon \rightarrow 0} \int_{\Gamma_\epsilon} (W \delta_{jk} - \sigma_{ij} u_{i,k}) n_j d\Gamma \\
 &= \lim_{\Gamma_\epsilon \rightarrow 0} \int_{\Gamma_\epsilon} P_{kj} n_j d\Gamma,
 \end{aligned}
 \tag{35}$$

where P_{kj} is the Eshelby tensor, $W = 1/2 \sigma_{ij} \epsilon_{ij}$ is the strain energy density, n_j is the unit outward normal of Γ_ϵ . J_1 represents a special case, the J integral. Throughout the paper we will use these two notations interchangeably. All the variables are defined in the crack tip local coordinate system (x_0, y_0) as in Fig. 5a. However, from the numerical point of view, it is difficult to calculate the limit in Eq. (35), so that the definition of J_k is usually modified in the following way. Since the integral of the Eshelby tensor is equal to zero for any closed contour, which does not contain a defect, additional contours Γ , Γ_{c^+} , Γ_{c^-} are introduced, such that Eq. (35) can be rewritten as [Eischen \(1987\)](#)

$$\begin{aligned}
 J_k &= \lim_{\Gamma_\epsilon \rightarrow 0} \int_{\Gamma_\epsilon} P_{kj} n_j d\Gamma = \int_{\Gamma} P_{kj} n_j d\Gamma \\
 &\quad + \int_{\Gamma_{c^+}} P_{kj} n_j d\Gamma + \int_{\Gamma_{c^-}} P_{kj} n_j d\Gamma.
 \end{aligned}
 \tag{36}$$

When $k = 1$, for a flat crack $n_1 = 0$ along the crack surfaces and thus along the contours Γ_{c^+} and Γ_{c^-} the integral is zero, and Eq. (36) simplifies to:

$$J_1 = \int_{\Gamma} P_{1j} n_j d\Gamma.
 \tag{37}$$

This expression shows the path independence of the J integral for a flat crack. But for the J_2 integral, the term associated with the crack surface cannot be omitted

Fig. 4 Mesh and collocation for crack surfaces


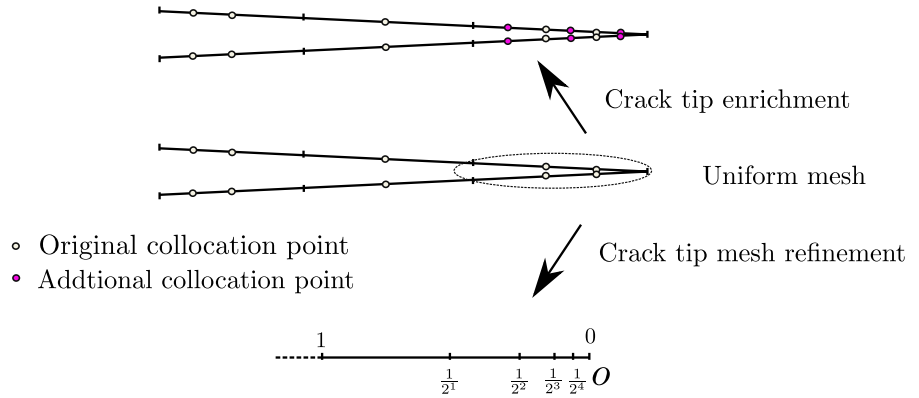


Fig. 5 Path definition for J integral

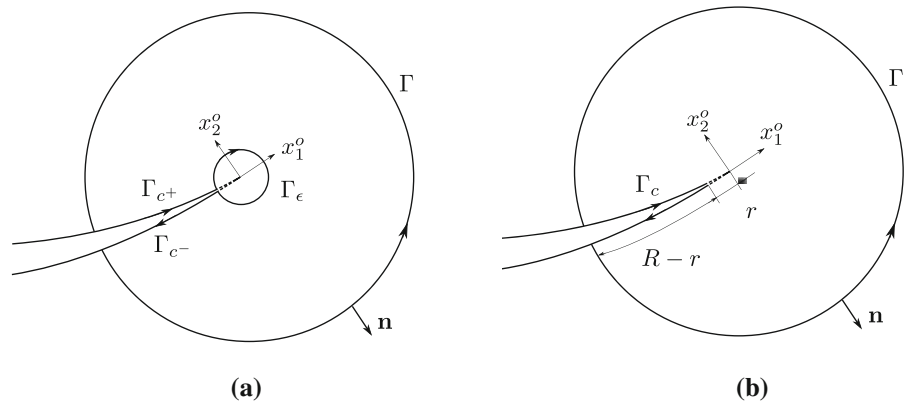

since $n_2 = 1$ and this term leads to a singularity in numerical evaluation.

The most general 2D scenario must account for curved cracks. The associated contribution from the crack surfaces to both J_1 and J_2 cannot in general be neglected. It should be noted that the energy density $W \rightarrow 1/r$ when approaching the crack tip since both σ_{ij} and ϵ_{ij} tend to $1/\sqrt{r}$. The integrand along the crack surface will remain of $O(1/r)$, and this kind of singular integral cannot be treated in a regular way. In Eischen (1987) and Chang and Wu (2007), the crack surface was split into a far field part and a near-tip part (Fig. 5b) in order to evaluate the singular integral:

$$J_k = \int_{\Gamma} P_{kj} n_j d\Gamma + \int_{R-r} \llbracket W \rrbracket n_k^+ d\Gamma + \int_r \llbracket W \rrbracket n_k^+ d\Gamma. \tag{38}$$

The far field part is integrated by regular Gauss quadrature. The near-tip part integral on the crack surface can be simply omitted for J_1 ($k = 1$), since n_1 is mostly zero, while for J_2 ($k = 2$), the near-tip part exhibits

the $O(1/r)$ singularity. The energy jump $\llbracket W \rrbracket$ on the near-tip surface can be evaluated as in Eischen (1987):

$$\llbracket W \rrbracket = \frac{-4K_{II}\sigma_{x0}}{E\sqrt{2\pi r}} + O(r^{1/2}), \tag{39}$$

where σ_{x0} is called T-stress. Thus near-tip part of $\llbracket W \rrbracket$ can be represented as a proportion to the $r^{1/2}$

$$J_k = \int_{\Gamma} P_{kj} n_j d\Gamma + \int_{R-r} \llbracket W \rrbracket n_k^+ d\Gamma + \Lambda n_k r^{1/2}. \tag{40}$$

Since two unknown variables J_2 and Λ appear in the above equation, the integral cannot be evaluated at once. The splitting procedure needs to be performed several times by taking different r , and a group of values of J_2 and Λ can be found in order to extrapolate J_2 for the case of no splitting. In Eq. (40), as long as the $O(1/r^{1/2})$ can be captured, the J_k integral can be correctly evaluated and the SIFs can be deduced (see Appendix 2). Nevertheless, the choice of the extraction radius ‘ r ’ becomes path dependent and problem dependent in real applications.

4.2 M integral

The M integral is another possible method to extract the SIFs. By applying the J integral under two states, the actual state (denoted with superscript ‘1’), and the auxiliary state (superscript ‘2’), and adding them together:

$$J^{(1+2)} = \int_{\Gamma_\epsilon} \left[\frac{1}{2}(\sigma_{ij}^{(1)} + \sigma_{ij}^{(2)})(\epsilon_{ij}^{(1)} + \epsilon_{ij}^{(2)})\delta_{1j} - (\sigma_{ij}^{(1)} + \sigma_{ij}^{(2)}) \frac{\partial(u_i^{(1)} + u_i^{(2)})}{\partial x_1} \right] n_j d\Gamma. \quad (41)$$

Rearranging the two state terms gives

$$J^{(1+2)} = J^{(1)} + J^{(2)} + M^{(1,2)}, \quad (42)$$

where

$$M^{(1,2)} = \int_{\Gamma_\epsilon} \left[W^{(1,2)}\delta_{1j} - \sigma_{ij}^{(1)} \frac{\partial u_i^{(2)}}{\partial x_1} - \sigma_{ij}^{(2)} \frac{\partial u_i^{(1)}}{\partial x_1} \right] n_j d\Gamma, \quad (43a)$$

$$W^{(1,2)} = \sigma_{ij}^{(1)} \epsilon_{ij}^{(2)} = \sigma_{ij}^{(2)} \epsilon_{ij}^{(1)}. \quad (43b)$$

Once the M integral has been evaluated, the SIFs can be extracted directly (see Appendix 2). But we note that in Yau et al’s work (1980), a flat crack surface is assumed. When applied to practical problems, the radius of the contour circle should be chosen ‘small enough’ to guarantee that within the domain bounded by Γ , the crack is ‘almost’ straight.

In this paper, the M integral is adopted. A detailed comparison of both methods applied to curved cracks is provided in the forthcoming sections.

Once the SIFs have been obtained, the maximum hoop stress criterion is used to determine the direction of crack propagation. We assume that the crack propagates in the direction θ_c such that the hoop stress is maximum, which is given (see Erdogan and Sih 1963, for example) by the following expression. Note that the quantity of interest determining the accuracy of each propagation step is the ratio (K_{II}/K_I)

$$\theta_c = 2\arctan \left[\frac{-2(K_{II}/K_I)}{1 + \sqrt{1 + 8(K_{II}/K_I)^2}} \right]. \quad (44)$$

5 2D NURBS crack propagation

A NURBS crack propagation algorithm is outlined next. The conceptual idea for the deformation of the NURBS curve representing the crack is realised by moving the control points to make the curve satisfy the external constraints under a user-defined function (LaGreca et al. 2005). For crack growth, the external constraint is the movement of the position of crack tip (or crack front in 3D). Paluszny and Zimmerman (2013) implemented the idea in FEM to represent crack growth or intersection by updating the control points to satisfy the constraints given by fracture parameters. The algorithm is briefly reviewed as follows:

- Initiation: represent the crack by the NURBS curve;
- Calculate the new physical position of the crack tip M' (the space constraint). This is determined by specified fracture criterion given in Sect. 4.2;
- Specify the parametric coordinate ξ (the parametric constraint) of the old crack tip M ;
- Define the influence functions f . Here for 2D fracture these functions are selected as the NURBS basis functions at the parametric constraint ξ (which is called natural deformation in LaGreca et al. (2005)). $f(A) = R_{A,p}(\xi)$, $A = 1, \dots, n$, n is the number of NURBS basis function of the corresponding control point P_A .
- Calculating the motion vector of each control point $\mathbf{m}(A)$: the movement of the control points is given by

$$\mathbf{m}(A) = \frac{f(A)}{\sum_{B=1}^n R_{B,p}(\xi)f(B)} \mathbf{e}, \quad \mathbf{e} = \overrightarrow{MM'}. \quad (45)$$

The process to stretch a NURBS curve to simulate crack growth in 2D is illustrated in Fig. 6. Certain knot insertion should be done at the crack tip element in order to capture the local changes. We note that refining the crack tip element also helps improve the solution near the crack tip, and a graded mesh refinement is designed as in Fig. 4, where the new knots are inserted consecutively at the $(1/2)^i$, $i = 1, 2, 3, 4, \dots$ of the distance to the crack tip in parametric space (the obtained meshes are denoted as $R1, R2, R3, R4 \dots$).

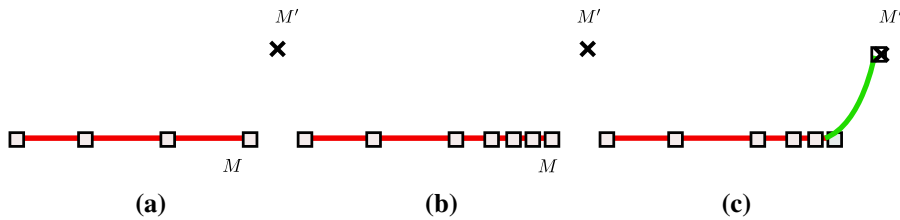


Fig. 6 NURBS modification for crack growth. **a** Original crack and new crack tip M' ; **b** knot insertion to refine the crack tip element; **c** move the control points to obtain new crack curve by the presented algorithm

6 Numerical examples

In this section, several numerical examples are presented to verify the proposed method for fracture analysis. We first give examples to study the behavior of the (X)IGABEM on static fracture analysis. Then the application to crack propagation by comparing against XFEM is demonstrated. A fixed number of Gauss points ($ngp = 30$) is adopted for the integration of both singular and nearly-singular integrals, although we note that it would be desirable to develop adaptive quadrature rules for the nearly-singular integrals in BEM. The order of NURBS basis and discontinuous lagrange basis is taken as 2 for all the examples.

6.1 Edge crack

Figure 7 illustrates the chosen edge crack problem. we use the first-term asymptotic solution of a crack problem (Westergaard 1939) (refer to the auxiliary displacements in Appendix 2), which we prescribe as

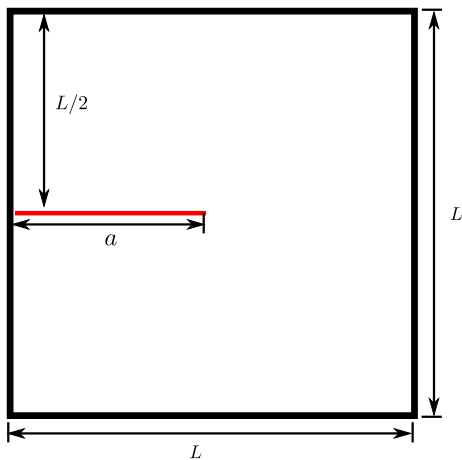


Fig. 7 Edge crack

Dirichlet boundary condition on the outer boundaries, while keeping crack faces traction free. The parameters $E = 1, \nu = 0.3, a = 1, L = 2$. For a mode I crack, $K_I = 1, K_{II} = 0$ and for a mode II crack, $K_I = 0, K_{II} = 1$. Thus the numerical displacement field on the crack as well as the SIFs can be compared to the analytical solution.

6.1.1 Ability of the method to capture the crack tip singularity

An accurate approximation of the solution near the crack tip is crucial to the accurate evaluation of fracture parameters such as the SIFs. Three scenarios are studied here, uniform meshes, graded refinement and enrichment of the crack tip element with function given in Eq. (32). Figure 8 shows the displacement u_y along the upper crack surface for the mode I problem. The crack is discretized by 3 uniform elements. It can be

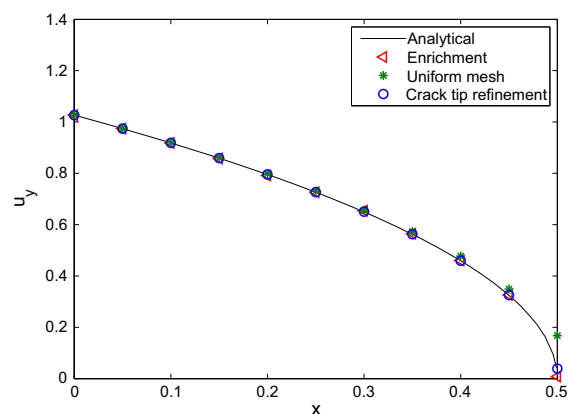


Fig. 8 u_y along the upper crack surface. It can be observed that in all cases, the numerical displacements agree well with the analytical solution, even for coarse meshes. The graded refinement and enrichment method both give improved results near the crack tip

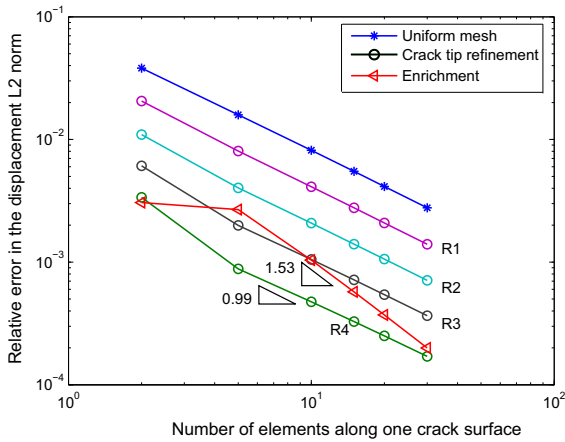


Fig. 9 Relative error in L_2 norm of the displacement along the crack surface. Note that R_1 , R_2 , R_3 and R_4 correspond to the crack tip element’s refinement by consecutive knot insertions at $(1/2)^1$, $(1/2)^2$, $(1/2)^3$ and $(1/2)^4$ of the distance to the crack tip in parametric space. It can be seen that enrichment achieves an accuracy which is intermediate between R_3 and R_4 graded meshes while the convergence rate is improved by 55 % compared to the graded mesh refinement

observed that in all cases, the numerical displacements agree well with the analytical solution, even for coarse meshes. The graded refinement and enrichment method both give improved results near the crack tip. To further assess the accuracy of these methods, the error in the displacement L_2 norm of the displacements along the crack surfaces, given by

$$e_{L_2} = \sqrt{\frac{\int_{\Gamma_c} (\mathbf{u} - \mathbf{u}_{ext})^T (\mathbf{u} - \mathbf{u}_{ext}) d\Gamma}{\int_{\Gamma_c} \mathbf{u}_{ext}^T \mathbf{u}_{ext} d\Gamma}} \quad (46)$$

is plotted in Fig. 9. We check the convergence results by inserting the knots at $(1/2)^i$ consecutively until $i = 4$ described in Fig. 4 (the results are denoted as R_1 , R_2 , R_3 and R_4 respectively). It can be seen that enrichment achieves an accuracy which is intermediate between R_3 and R_4 graded meshes while the convergence rate is improved by 55 % compared to the graded mesh refinement. In the following examples for static crack and crack propagation, the graded mesh refinement by 4 successive knot insertions is used for study further.

6.1.2 SIFs comparison with Lagrange basis

To evaluate the potential of IGABEM for fracture, the SIFs given by the M integral are compared to those

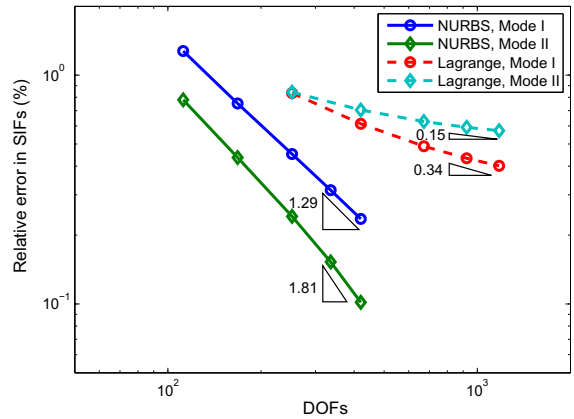


Fig. 10 Convergence results of SIF for the mode I and mode II crack. It can be observed that the precision provided by NURBS basis is much higher (one order of magnitude for approximately 500 DOFs) than that of discontinuous Lagrange basis

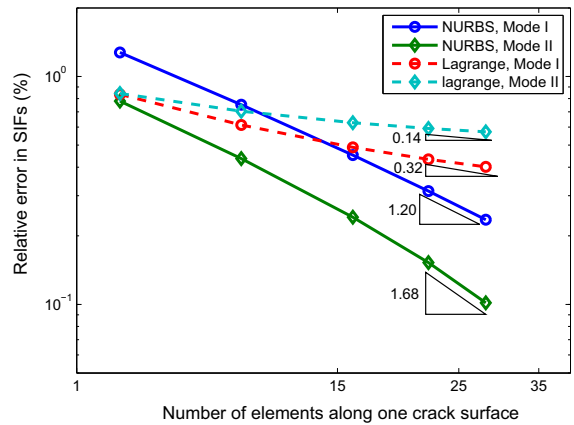


Fig. 11 Convergence results of SIF for the mode I and mode II crack, plotting in terms of element number

from Lagrange elements using uniform meshes and no special treatment for the crack tip. The radius for the M integral is taken as the distance from the crack tip to the third collocation point counting from the crack tip, thus with mesh refinement, the extraction domain will shrink. A convergence check for the error in the normalized SIFs K_I , K_{II} is shown in Fig. 10. It can be observed that the precision provided by NURBS basis is much higher (one order of magnitude for approximately 500 DOFs) than that of discontinuous Lagrange basis. Because discontinuous Lagrange basis typically leads to more nodes than NURBS basis for a given number of elements (as presented in Fig. 3), the convergence results are re-plotted in terms of number of elements in Fig. 11. For the two coarsest meshes of 4

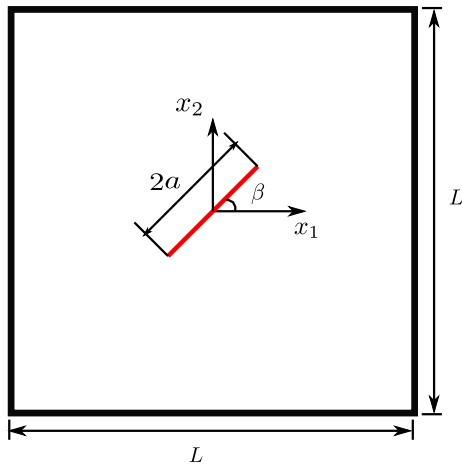


Fig. 12 Physical model of an inclined center crack problem

elements per edge, the Lagrange basis is more accurate than NURBS, but with mesh refinement, the NURBS becomes superior, due to a larger convergence rate. From both figures, it is observed that the convergence rates of SIFs by NURBS basis is 5–8 times higher than those by discontinuous Lagrange basis.

6.2 Inclined centre crack

In this example, The SIFs are calculated for a plate with an inclined crack under remote biaxial tension such that $\sigma = \sigma_0$ is applied in the y -direction and $\sigma = \lambda\sigma_0$ is applied in the x -direction, where λ is the load ratio and $\sigma_0 = 1$. The inclined centre crack with angle β varies from 0 to $\pi/2$, see Fig. 12. The edge length of the plate $L = 1$, crack length $2a = 0.02$. $L \gg a$ so that the numerical results can be compared with the analytical solution for an infinite plate, given in Smith et al. (2001). The elasticity parameters are $E = 1$, $\nu = 0.3$. The SIFs in this example obtained by the M integral can be compared to the analytical ones as follows:

$$K_I = \sigma\sqrt{\pi a}(\cos^2\beta + \lambda\sin^2\beta), \quad (47a)$$

$$K_{II} = \sigma\sqrt{\pi a}(1 - \lambda)\cos\beta\sin\beta. \quad (47b)$$

The mesh of the crack surface was refined uniformly for both the discontinuous Lagrange basis BEM (LBEM) and NURBS (IGABEM). The local graded refinement for crack tip elements described in Fig. 4 is also performed (the corresponding result is denoted as IGABEM(r)). Assuming the number of elements for

Table 2 Normalized K_I in inclined centre crack

m	K_I/K_I^{exact}			
	SGBEM	LBEM	IGABEM	IGABEM(r)
3	0.9913	1.00451	1.00982	1.00120
4	1.0002	1.00333	1.00769	1.00105
5	1.0001	1.00268	1.00633	1.00090
6	1.0002	1.00230	1.00539	1.00080
7	1.0003	1.00206	1.00474	1.00074
8	1.0003	1.00190	1.00426	1.00070
9	1.0003	1.00177	1.00389	1.00066
10	1.0003	1.00167	1.00359	1.00064
11	1.0003	1.00159	1.00336	1.00062
12	1.0003	1.00152	1.00316	1.00060
14	1.0003	1.00142	1.00285	1.00058

Table 3 Normalized K_{II} in inclined centre crack

m	K_{II}/K_{II}^{exact}			
	SGBEM	LBEM	IGABEM	IGABEM(r)
3	1.0075	1.00104	1.00647	1.00146
4	1.0009	1.00129	1.00656	1.00129
5	1.0010	1.00158	1.00607	1.00113
6	1.0009	1.00160	1.00550	1.00102
7	1.0014	1.00153	1.00500	1.00096
8	1.0005	1.00143	1.00458	1.00091
9	0.9997	1.00134	1.00424	1.00087
10	1.0009	1.00126	1.00396	1.00085
11	0.9992	1.00119	1.00373	1.00083
12	1.0013	1.00112	1.00353	1.00081
14	1.0004	1.00102	1.00322	1.00079

the crack is m , a convergence check is done with the crack angle $\beta = \pi/6$ at load ratio $\lambda = 0.5$ (biaxially loaded). The results are given in Table 2 and 3. Here the SGBEM results (Sutradhar and Paulino 2004) are also given as a reference. It can be concluded that the proposed local crack tip refinement gives a very good accuracy for practical applications.

The SIFs are then compared for different angles at $\lambda = 0$ (uniaxially loaded). In this case, the crack is discretized by 4 uniform elements, and for IGABEM, the crack tip element is further refined in the same fashion. The SIFs are given in Table 4.

Table 4 SIFs and relative error (in brackets) for the inclined centre crack

β	K_I			K_{II}		
	Exact	IGABEM(r)	SGBEM	Exact	IGABEM(r)	SGBEM
0	1.0000	1.0006 (6.0e-4)	1.0002 (2.0e-4)	0.0000	0.0000 (<1.e-4)	0.0000 (<1.e-4)
$\pi/12$	0.9330	0.9336 (6.4e-4)	0.9332 (2.1e-4)	0.2500	0.2503 (1.2e-3)	0.2502 (8.0e-4)
$\pi/6$	0.7500	0.7505 (6.7e-4)	0.7502 (2.7e-4)	0.4330	0.4336 (1.4e-3)	0.4334 (9.2e-4)
$\pi/4$	0.5000	0.5003 (6.0e-4)	0.5001 (2.0e-4)	0.5000	0.5006 (1.2e-3)	0.5004 (6.0e-4)
$\pi/3$	0.2500	0.2501 (4.0e-4)	0.2500 (<1.e-4)	0.4330	0.4335 (1.2e-3)	0.4333 (6.9e-4)
$5\pi/12$	0.0670	0.0670 (<1.e-4)	0.0670 (<1.e-4)	0.2500	0.2503 (1.2e-3)	0.2502 (8.0e-4)
$\pi/2$	0.0000	0.0000 (<1.e-4)	0.0000 (<1.e-4)	0.0000	0.0000 (<1.e-4)	0.0000 (<1.e-4)

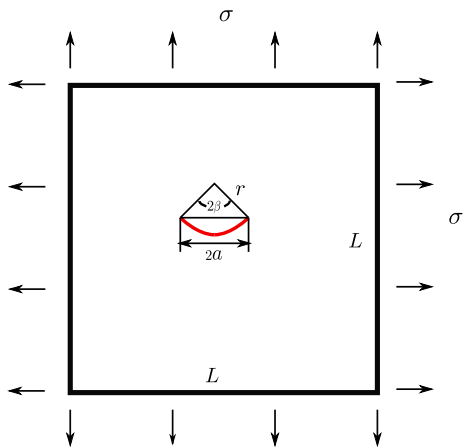


Fig. 13 Physical model of the arc crack

6.3 Arc crack

The circular arc crack under remote uniform biaxial tension is used to further validate the effectiveness of the proposed method for curved cracks. The problem is defined in Fig. 13. Here $L = 1, 2a = 0.01, L \gg a,$

Table 5 SIFs for the arc crack

m	K_I/K_I^{exact}		K_{II}/K_{II}^{exact}	
	M integral	J_k integral	M integral	J_k integral
10	1.00045	0.99972	0.97506	1.00309
14	1.00014	0.99979	0.98621	1.00248
17	1.00011	0.99982	0.98642	1.00217
20	1.00009	0.99985	0.98657	1.00195
23	1.00002	0.99987	0.99407	1.00176
26	1.00002	0.99989	0.99413	1.00163

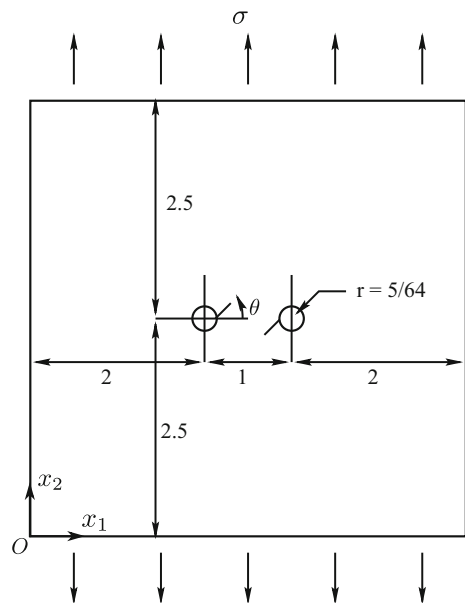


Fig. 14 Physical model of rivet holes plate with initial cracks emanating from the holes. The initial crack lengths are 0.1 (Moës et al. 1999)

$E = 1, \nu = 0.3.$ In the test $\sigma = 1, \beta = \pi/4.$ The analytical SIFs are given by Cotterell and Rice (1980) as:

$$K_I = \sigma \sqrt{\pi a} \frac{\cos(\beta/2)}{1 + \sin^2(\beta/2)}, \tag{48a}$$

$$K_{II} = \sigma \sqrt{\pi a} \frac{\sin(\beta/2)}{1 + \sin^2(\beta/2)}. \tag{48b}$$

m elements are used to discretize each crack surface with crack tip elements refined as in Fig. 4. A convergence check for the SIFs are listed in Table 5. Here the SIF extraction from both the J_k integral method and

Fig. 15 Crack path comparison. XFEM(M) is Moës et al. (1999); XFEM* is from the in-house XFEM code

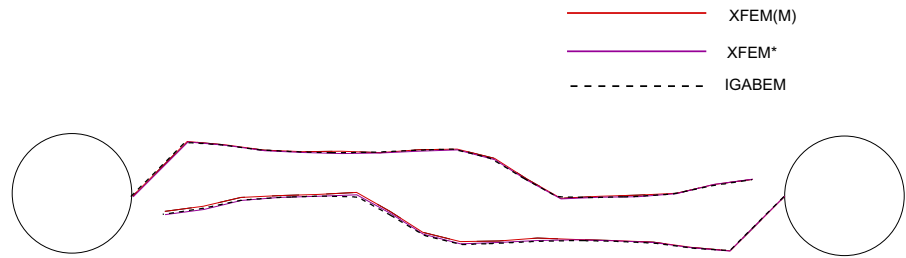


Table 6 Tip position for left crack tip with $\Delta a = 0.05$

Step	IGABEM		XFEM*		XFEM(M)	
	x_c	y_c	x_c	y_c	x_c	y_c
Initial	2.1488	2.5707	2.1488	2.5707	2.1488	2.5707
1	2.1986	2.5665	2.1986	2.5662	2.1986	2.5663
2	2.2481	2.5596	2.2481	2.5593	2.2481	2.5595
3	2.2981	2.5575	2.2981	2.5570	2.2981	2.5575
4	2.3481	2.5564	2.3480	2.5556	2.3481	2.5581
5	2.3981	2.5573	2.3980	2.5564	2.3981	2.5562
6	2.4480	2.5598	2.4480	2.5587	2.4480	2.5600
7	2.4980	2.5614	2.4979	2.5604	2.4980	2.5608
8	2.5463	2.5485	2.5463	2.5477	2.5465	2.5488
9	2.5885	2.5217	2.5885	2.5209	2.5886	2.5219
10	2.6324	2.4978	2.6324	2.4968	2.6321	2.4972
11	2.6824	2.4986	2.6823	2.4990	2.6820	2.4998
12	2.7324	2.5000	2.7323	2.4997	2.7320	2.5013
13	2.7823	2.5035	2.7821	2.5036	2.7819	2.5037
14	2.8311	2.5144	2.8307	2.5157	2.8306	2.5151
15	2.8805	2.5217	2.8802	2.5223	2.8802	2.5217

XFEM(M) is from Moës et al. (1999), XFEM* is from the in-house XFEM code. The final difference in the crack tip positions between all three paths does not exceed the difference in the third digital sign

the M integral method are compared. Both methods use the same radius R , and the partition of the crack surface for the J_k integral is done by experience at $r = 0.03R, 0.04R, 0.05R, 0.06R, 0.07R$. The results of the two methods are comparable, differing only at the fourth digit. But we note that the J_k integral method is more computationally expensive than the M integral as (1) it needs integration on the crack surfaces; (2) the crack surface needs to be partitioned into two parts; (3) the integration needs to be performed several times as described in Sect. 4.1.

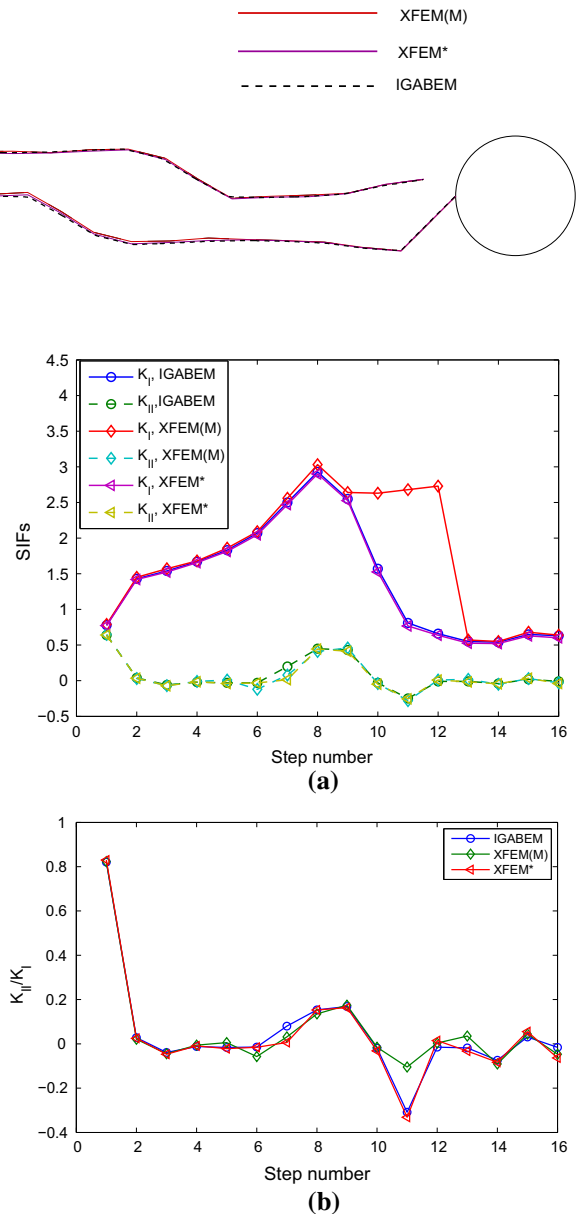


Fig. 16 SIF comparison of the left crack tip for the whole process of crack propagation. XFEM(M) is from Moës et al. (1999), XFEM* is from the in-house XFEM code

6.4 Crack growth in a plate with rivet holes

The purpose of this example is to evaluate the potential of IGABEM for crack growth. The problem is chosen from the XFEM work by Moës et al. (1999). The geometry and loading conditions are illustrated in Fig. 14 ($\theta = \pi/4$, initial crack length $a = 0.1$). The mater-

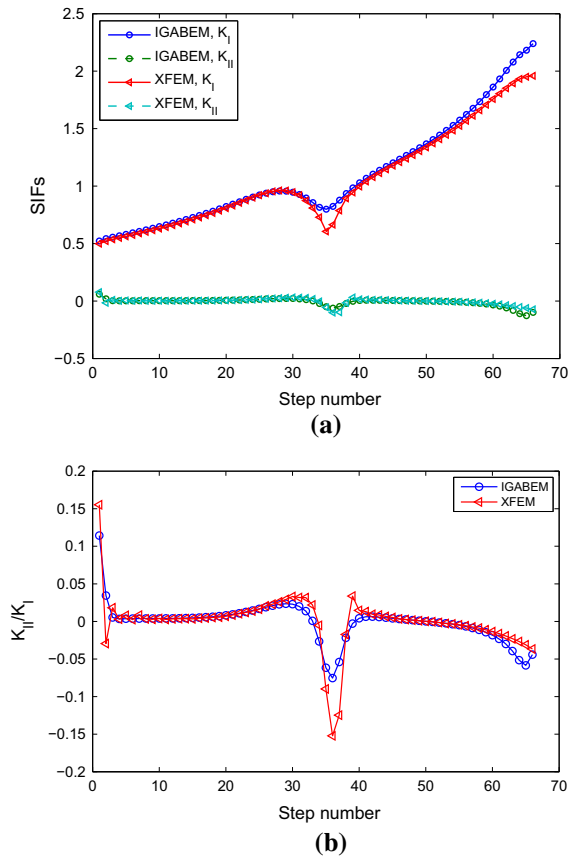


Fig. 19 Comparison of the SIFs for the whole process of crack propagation


loading conditions are illustrated in Fig. 17. The material parameters are $E = 1000$, $\nu = 0.37$. Plane strain conditions are assumed. With variation of the position of the initial crack, different crack trajectories were obtained experimentally in [Ingraffea and Grigoriu \(1990\)](#). Here the position of the initial crack is set as $d = 5$, $a = 1.5$. This example has been solved using XFEM and XEFG ([Ventura et al. 2002](#)) as well. The crack advance Δa is set to be 0.052 for both XFEM and

IGABEM. The model is discretized by 27,869 nodes and 55,604 triangular elements for XFEM. And for IGABEM, 82 elements and 230 DOFs are used. Crack tip mesh refinement is used without enrichment. In [Ventura et al. \(2002\)](#), the XEFG model size is not given, but the crack increment $\Delta a = 0.1$. Figure 18 compares the crack growth paths using all the mentioned methods. All the crack paths agree well with the experiments. Of course, due to the differences in discretization and crack increment, the numerical results do differ. It can be observed that the IGABEM reproduces slightly better the experimental crack trajectory than the XFEM for the case when the crack passes through the first hole. Nevertheless, it is noted that the different size of crack increment could have influence on the final crack path ([Sutula and Bordas 2013](#)). How to give the crack increment size Δa needs to be further studied ([Kaczmarczyk et al. 2014](#); [Davis et al. 2016](#)). Figure 19 compares the SIFs from XFEM and IGABEM. We note that significant difference in SIF values and the ratio of K_{II}/K_I occur when the crack passes near the first hole. A possible explanation for this could be that in XFEM, the domain used for SIF extraction is allowed to be intersected with the boundary of the domain.

6.6 Crack propagation in an open spanner

The last example consists in simulating the failure process of an open spanner due to crack propagation, in which the geometry is taken directly from CAD. The physical configuration is shown in Fig. 20. As in industrial damage tolerance assessment ([Bordas and Moran 2006](#)), we assume that a small defect has initiated from the surface at the area of high stress concentration obtained from an elastostatic analysis ([Simpson et al. 2012](#)). The initial geometry including the crack is given in Fig. 21. The crack will grow with $\Delta a = 0.1$. Figure 22 presents the deformed geometry with the

Fig. 20 Boundary conditions, materials and geometry of the open spanner ([Simpson et al. 2012](#))

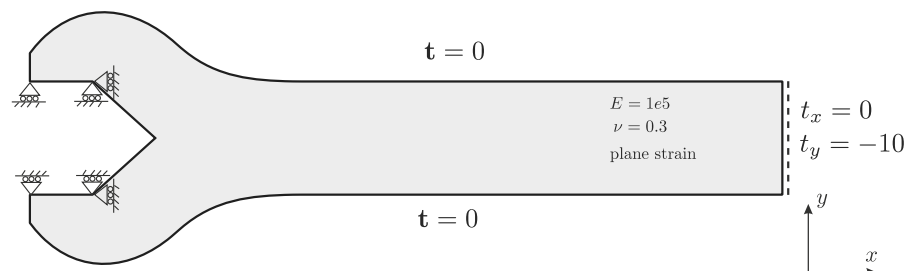

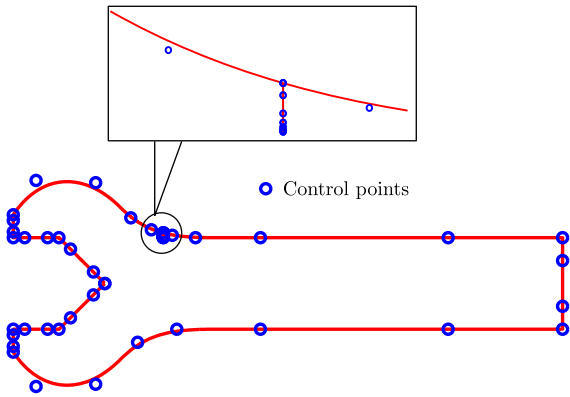


Fig. 21 Control points and NURBS representation of the open spanner

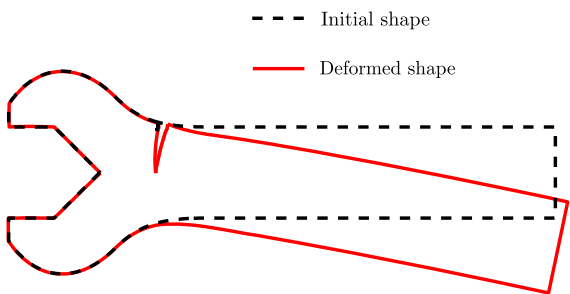


Fig. 22 The deformed geometry after 10 steps of crack propagation

crack. This example gives a straightforward illustration of the concept of seamless integration of CAD and failure analysis, since no mesh generator is required and the crack path is obtained directly from CAD.

7 Conclusions

A detailed procedure to model linear elastic fracture problem using the NURBS based IGABEM is proposed in this work. The dual BIEs is introduced so that cracks can be modeled in a single domain. Different treatments for crack tip singularity are investigated including crack tip graded mesh refinement and partition of unity enrichment. The popular approaches to extract SIFs are compared in the framework of IGABEM and it proves that the M integral is more efficient for SIF extraction in IGABEM. The cracks are modeled directly by NURBS, and an algorithm for modifying the NURBS curve is implemented to describe the crack propagation. Numerical examples shows that:

- (1) The IGABEM can obtain a higher accuracy than Lagrange basis based BEM for the same model size or DOFs. The convergence rate in SIFs has been improved by 5–8 times than BEM with discontinuous Lagrange basis without any treatment to the crack tip;
- (2) Both crack tip graded mesh refinement and enrichment can improve the displacement field near the crack tip, and the graded mesh refinement is selected to apply in the crack growth;
- (3) The proposed crack growth procedure can lead to C^1 smooth crack trajectory and agrees well with those results from XFEM.
- (4) A procedure for damage tolerance assessment directly from CAD is presented, which does not require any mesh (re)generation.

The authors believe that the crack propagation in three dimensional domain would benefit more thanks to the smooth crack representation and higher order continuous NURBS basis, which would provide a distinct solution scheme for fracture analysis when compared to the idea in the framework of FEM/XFEM.

Acknowledgements The first and last authors would like to acknowledge the financial support of the Framework Programme 7 Initial Training Network Funding under grant number 289361 ‘Integrating Numerical Simulation and Geometric Design Technology’. S. P. A. Bordas also thanks partial funding for his time provided by the UK Engineering and Physical Science Research Council (EPSRC) under grant EP/G069352/1 ‘Advanced discretization strategies for ‘atomistic’ nano CMOS simulation; the EPSRC under grant EP/G042705/1 ‘Increased Reliability for Industrially Relevant Automatic Crack Growth Simulation with the eXtended Finite Element Method’ and the European Research Council Starting Independent Research Grant (ERC Stg grant agreement No. 279578) entitled ‘Towards real time multiscale simulation of cutting in non-linear materials with applications to surgical simulation and computer guided surgery’. E. Atroshchenko was partially supported by Fondecyt grant number 11130259 entitled ‘Boundary element modeling of crack propagation in micropolar materials’.

Appendix 1

The fundamental solutions for traction BIE are:

$$K_{ij} = \frac{1}{4\pi(1-\nu)r} [(1-2\nu)(\delta_{ij}r_{,k} + \delta_{jk}r_{,i} - \delta_{ik}r_{,j}) + 2r_{,i}r_{,j}r_{,k}]n_k(\mathbf{s}) \tag{49}$$

$$S_{ij} = \frac{\mu}{2\pi(1-\nu)r^2} \left\{ 2 \frac{\partial r}{\partial n} [(1-2\nu)\delta_{ik}r_{,j} + \nu(\delta_{ij}r_{,k} + \delta_{jk}r_{,i}) - 4r_{,i}r_{,j}r_{,k}] \right.$$

$$\begin{aligned}
 &+ 2\nu(n_{i,r,jr,k} + n_{k,r,ir,j}) - (1 - 4\nu)\delta_{ik}n_j \\
 &+ (1 - 2\nu)(2n_{j,r,ir,k} + \delta_{ij}n_k + \delta_{jk}n_i) \} n_k(\mathbf{s})
 \end{aligned} \tag{50}$$

Now we present the SST formula for the hyper-singular integral as follows. Expanding the components of distance between field and source points as Taylor series in parent space gives:

$$\begin{aligned}
 x_i - s_i &= \frac{dx_i}{d\hat{\xi}} \Big|_{\hat{\xi}=\hat{\xi}_s} (\hat{\xi} - \hat{\xi}_s) + \frac{d^2x_i}{d\hat{\xi}^2} \Big|_{\hat{\xi}=\hat{\xi}_s} \frac{(\hat{\xi} - \hat{\xi}_s)^2}{2} + \dots \\
 &:= A_i(\hat{\xi} - \hat{\xi}_s) + B_i(\hat{\xi} - \hat{\xi}_s)^2 + \dots \\
 &= A_i\delta + B_i\delta^2 + O(\delta^3)
 \end{aligned} \tag{51}$$

and

$$\begin{aligned}
 A &:= \left(\sum_{k=1}^2 A_k^2 \right)^{\frac{1}{2}} \\
 C &:= \sum_{k=1}^2 A_k B_k
 \end{aligned} \tag{52}$$

The first and second derivatives are:

$$\begin{aligned}
 \frac{dx_i}{d\xi} &= \frac{dN_a}{d\xi} x_i^a \\
 \frac{d^2x_i}{d\xi^2} &= \frac{d^2N_a}{d\xi^2} x_i^a \\
 \frac{dx_i}{d\hat{\xi}} &= \frac{dx_i}{d\xi} \frac{d\xi}{d\hat{\xi}} \\
 \frac{d^2x_i}{d\hat{\xi}^2} &= \frac{d^2x_i}{d\xi^2} \left(\frac{d\xi}{d\hat{\xi}} \right)^2
 \end{aligned} \tag{53}$$

The derivative $r_{,i}$ can be expressed as

$$\begin{aligned}
 r_{,i} &= \frac{x_i - s_i}{r} = \frac{A_i}{A} + \left(B_i A - A_i \frac{A_k B_k}{A^3} \right) \delta + O(\delta^2) \\
 &:= d_{i0} + d_{i1}\delta + O(\delta^2)
 \end{aligned} \tag{54}$$

The term $1/r^2$ can be expressed as

$$\begin{aligned}
 \frac{1}{r^2} &= \frac{1}{A^2\delta^2} - \frac{2C}{A^4\delta} + O(1) \\
 &:= \frac{S_{-2}}{\delta^2} + \frac{S_{-1}}{\delta} + O(1)
 \end{aligned} \tag{55}$$

The component of Jacobian from parametric space to physical space can be expressed as:

$$\begin{aligned}
 J_1(\xi) &= J_{10}(\xi_s) + J_{11}(\xi_s)(\xi - \xi_s) + O((\xi - \xi_s)^2) \\
 &= J_{10}(\xi_s) + \frac{d\xi}{d\hat{\xi}} \Big|_{\hat{\xi}=\hat{\xi}_s} J_{11}(\xi_s)\delta + O(\delta^2) \\
 J_2(\xi) &= J_{20}(\xi_s) + J_{21}(\xi_s)(\xi - \xi_s) + O((\xi - \xi_s)^2) \\
 &= J_{10}(\xi_s) + \frac{d\xi}{d\hat{\xi}} \Big|_{\hat{\xi}=\hat{\xi}_s} J_{21}(\xi_s)\delta + O(\delta^2) \\
 &\text{i.e.,} \\
 J_k(\xi) &:= J_{k0}(\xi_s) + \frac{d\xi}{d\hat{\xi}} \Big|_{\hat{\xi}=\hat{\xi}_s} J_{k1}(\xi_s)\delta + O(\delta^2)
 \end{aligned} \tag{56}$$

and we note that

$$\begin{aligned}
 J(\xi) &= \sqrt{J_1^2(\xi) + J_2^2(\xi)} = \sqrt{\left(\frac{dy}{d\xi} \right)^2 + \left(-\frac{dx}{d\xi} \right)^2} \\
 \mathbf{n}(\xi) &= \left[\frac{dy}{d\xi}, -\frac{dx}{d\xi} \right] \\
 &\text{i.e.,} \\
 n_k(\xi) &= J_k(\xi)/J(\xi)
 \end{aligned} \tag{57}$$

And the NURBS basis function is also expanded as:

$$\begin{aligned}
 N_a(\hat{\xi}) &= N_a(\hat{\xi}_s) + \frac{dN_a}{d\xi} \Big|_{\xi=\xi_s} (\xi - \xi_s) + \dots \\
 &= N_a(\hat{\xi}_s) + \frac{dN_a}{d\xi} \Big|_{\xi=\xi_s} \frac{d\xi}{d\hat{\xi}} \Big|_{\hat{\xi}=\hat{\xi}_s} \delta + \dots \\
 &:= N_{a0}(\hat{\xi}_s) + N_{a1}(\hat{\xi}_s) \frac{d\xi}{d\hat{\xi}} \Big|_{\hat{\xi}=\hat{\xi}_s} \delta + O(\delta^2)
 \end{aligned} \tag{58}$$

The detail form of hyper-singular kernel S_{ij} is (plane strain)

$$\begin{aligned}
 S_{ij}(\mathbf{s}, \mathbf{x}) &= \frac{\mu}{2\pi(1-\nu)r^2} \left\{ 2 \frac{\partial r}{\partial n} [(1-\nu)\delta_{ik}r_{,j} \right. \\
 &\quad + \nu(\delta_{ij}r_{,k} + \delta_{jk}r_{,i} - 4r_{,i}r_{,j}r_{,k}) \\
 &\quad + 2\nu(n_{i,r,jr,k} + n_{k,r,ir,j}) - (1 - 4\nu)\delta_{ik}n_j \\
 &\quad \left. + (1 - 2\nu)(2n_{j,r,ir,k} + \delta_{ij}n_k + \delta_{jk}n_i) \right\} n_k(\hat{\xi}_s) \\
 &:= \frac{1}{r^2} h(\hat{\xi})
 \end{aligned} \tag{59}$$

Noting that $n_k(\xi) = J_k(\xi)/J(\xi)$, Use the above expansions to rewrite $h(\xi)$ as:

$$h(\hat{\xi}) = \frac{h_0(\hat{\xi}_s)}{J(\hat{\xi})} + \frac{h_1(\hat{\xi}_s)}{J(\hat{\xi})}\delta + O(\delta^2) \tag{60}$$

$$h_0(\hat{\xi}_s) = \left(2\nu(J_{i0}d_{j0}d_{k0} + J_{k0}d_{i0}d_{j0}) + (1 - 2\nu)(2J_{j0}d_{i0}d_{k0} + \delta_{ij}J_{k0} + \delta_{jk}J_{i0}) + (1 - 4\nu)\delta_{ik}J_{j0}\right) \frac{\mu}{2\pi(1 - \nu)} n_k(\hat{\xi}_s) \tag{61}$$

$$h_1(\hat{\xi}_s) = \left[2(d_{i1}J_{i0} + d_{i0}J_{i1})\left((1 - 2\nu)\delta_{ik}d_{j0} + \nu(\delta_{ij}d_{k0} + \delta_{jk}d_{i0}) - 4d_{i0}d_{j0}d_{k0}\right) + 2\nu\left(J_{i0}(d_{j1}d_{k0} + d_{j0}d_{k1}) + J_{i1}d_{j0}d_{k0} + J_{k0}(d_{i1}d_{j0} + d_{i0}d_{j1}) + J_{k1}d_{i0}d_{j0}\right) + (1 - 2\nu)\left(2(J_{j1}d_{i0}d_{k0} + J_{j0}(d_{i1}d_{k0} + d_{i0}d_{k1})) + \delta_{ij}J_{k1} + \delta_{jk}J_{i1}\right) - (1 - 4\nu)\delta_{ik}J_{j1}\right] \frac{\mu}{2\pi(1 - \nu)} n_k(\hat{\xi}_s) \tag{62}$$

Thus,

$$h(\hat{\xi})N_a(\hat{\xi})J(\hat{\xi}) = \left(h_0(\hat{\xi}_s) + h_1(\hat{\xi}_s)\delta + O(\delta^2)\right) \left(N_{a0}(\hat{\xi}_s) + \frac{d\xi}{d\hat{\xi}}\Big|_{\hat{\xi}=\hat{\xi}_s} N_{a1}(\hat{\xi}_s)\delta + O(\delta^2)\right) = h_0N_{a0} + \left(h_1N_{a0} + h_0N_{a1} \frac{d\xi}{d\hat{\xi}}\Big|_{\hat{\xi}=\hat{\xi}_s}\right)\delta + O(\delta^2) \tag{63}$$

$$F(\hat{\xi}_s, \hat{\xi}) = \frac{1}{r^2(\hat{\xi}_s, \hat{\xi})} h(\hat{\xi})N_a(\hat{\xi})J(\hat{\xi}) = \left(\frac{S_{-2}}{\delta^2} + \frac{S_{-1}}{\delta} + O(1)\right) \left(h_0N_{a0} + \left(h_1N_{a0} + h_0N_{a1} \frac{d\xi}{d\hat{\xi}}\Big|_{\hat{\xi}=\hat{\xi}_s}\right)\delta + O(\delta^2)\right) = \frac{S_{-2}h_0N_{a0}}{\delta^2} + \frac{S_{-1}h_0N_{a0} + S_{-2}\left(h_1N_{a0} + h_0N_{a1} \frac{d\xi}{d\hat{\xi}}\Big|_{\hat{\xi}=\hat{\xi}_s}\right)}{\delta} + O(1) := \frac{F_{-2}}{\delta^2} + \frac{F_{-1}}{\delta} + O(1) \tag{64}$$

Appendix 2

Once the J_1 and J_2 are evaluated properly, K_I and K_{II} can be found easily. Since

$$J_1 = \frac{K_I^2 + K_{II}^2}{E'} \tag{65a}$$

$$J_2 = -\frac{2K_I K_{II}}{E'} \tag{65b}$$

where $E' = E/(1 - \nu^2)$ for plane strain condition. And K_I and K_{II} can be solved as Eischen (1987):

$$K_I = \pm \left\{ \frac{E' J_1}{2} \left[1 \pm \left(1 - \left(\frac{J_2}{J_1} \right)^2 \right)^{1/2} \right] \right\}^{1/2} \tag{66a}$$

$$K_{II} = \pm \left\{ \frac{E' J_1}{2} \left[1 \mp \left(1 - \left(\frac{J_2}{J_1} \right)^2 \right)^{1/2} \right] \right\}^{1/2} \tag{66b}$$

The signs of K_I and K_{II} correspond to the signs of crack opening displacement $[[u_1]]$ and $[[u_2]]$, respectively. If $[[u_1]] > 0$, $K_I > 0$. The term in brace can be determined as :

$$\text{if } |[u_1]| \geq |[u_2]|, \text{ take } + \tag{67a}$$

$$\text{if } |[u_1]| < |[u_2]|, \text{ take } - \tag{67b}$$

Combined with Eq. 65a, the following relationship can be obtained for the M integral,

$$M^{(1,2)} = \frac{2}{E'} \left(K_I^{(1)} K_I^{(2)} + K_{II}^{(1)} K_{II}^{(2)} \right) \tag{68}$$

Let state 2 be the pure mode I asymptotic fields with $K_I^{(2)} = 1$, $K_{II}^{(2)} = 0$ and K_I in real state 1 can be found as

$$K_I^{(1)} = \frac{2}{E'} M^{(1, \text{mode } I)} \tag{69}$$

The K_{II} can be given in a similar fashion.

The auxiliary stress field $\sigma_{ij}^{(2)}$ and displacement field $u_j^{(2)}$ are given as:

$$\sigma_{xx}(r, \theta) = \frac{K_I^{(2)}}{\sqrt{2\pi r}} \cos \frac{\theta}{2} \left(1 - \sin \frac{\theta}{2} \sin \frac{3\theta}{2} \right) - \frac{K_{II}^{(2)}}{\sqrt{2\pi r}} \sin \frac{\theta}{2} \left(2 + \cos \frac{\theta}{2} \cos \frac{3\theta}{2} \right)$$

$$\sigma_{yy}(r, \theta) = \frac{K_I^{(2)}}{\sqrt{2\pi r}} \cos \frac{\theta}{2} \left(1 + \sin \frac{\theta}{2} \sin \frac{3\theta}{2} \right) + \frac{K_{II}^{(2)}}{\sqrt{2\pi r}} \sin \frac{\theta}{2} \cos \frac{\theta}{2} \cos \frac{3\theta}{2}$$

$$\tau_{xy}(r, \theta) = \frac{K_I^{(2)}}{\sqrt{2\pi r}} \sin \frac{\theta}{2} \cos \frac{\theta}{2} \cos \frac{3\theta}{2} + \frac{K_{II}^{(2)}}{\sqrt{2\pi r}} \cos \frac{\theta}{2} \left(1 - \sin \frac{\theta}{2} \sin \frac{3\theta}{2} \right)$$

$$u_x(r, \theta) = \frac{K_I}{2\mu} \sqrt{\frac{r}{2\pi}} \cos \frac{\theta}{2} \left(\kappa - 1 + 2\sin^2 \frac{\theta}{2} \right)$$

$$\begin{aligned}
 u_y(r, \theta) = & \frac{(1+\nu)K_{II}}{E} \sqrt{\frac{r}{2\pi}} \sin \frac{\theta}{2} \left(\kappa + 1 + 2\cos^2 \frac{\theta}{2} \right) \\
 & + \frac{K_I}{2\mu} \sqrt{\frac{r}{2\pi}} \sin \frac{\theta}{2} \left(\kappa + 1 - 2\cos^2 \frac{\theta}{2} \right) \\
 & + \frac{(1+\nu)K_{II}}{E} \sqrt{\frac{r}{2\pi}} \cos \frac{\theta}{2} \left(1 - \kappa + 2\sin^2 \frac{\theta}{2} \right)
 \end{aligned} \quad (70)$$

where (r, θ) are the crack tip polar coordinates and

$$\mu = \frac{E}{2(1+\nu)} \quad (71)$$

$$\kappa = \begin{cases} 3 - 4\nu, & \text{Plane strain} \\ (1 - \nu)/(3 + \nu), & \text{Plane stress} \end{cases} \quad (72)$$

The auxiliary strain field can be obtained by differentiating u_j with respect to the physical coordinate.

References

- Akerman I, Bazilevs Y, Calo VM, Hughes TJR, Hulshoff S (2008) The role of continuity in residual-based variational multiscale modeling of turbulence. *Comput Mech* 41(3):371–378
- Aour B, Rahmani O, Nait-Abdelaziz M (2007) A coupled FEM/BEM approach and its accuracy for solving crack problems in fracture mechanics. *Int J Solids Struct* 44(7–8):2523–2539
- Arnold D, Saranen J (1984) On the asymptotic convergence of spline collocation methods for partial differential equations. *SIAM J Numer Anal* 21(3):459–472
- Auricchio F, da Veiga LB, Lovadina C, Reali A (2010a) The importance of the exact satisfaction of the incompressibility constraint in nonlinear elasticity: mixed FEMs versus NURBS-based approximations. *Comput Methods Appl Mech Eng* 199(5–8):314–323
- Auricchio F, Veiga LBD, Hughes TJR, Reali A, Sangalli G (2010b) Isogeometric collocation methods. *Math Models Methods Appl Sci* 20(11):2075–2107
- Bazilevs Y, Calo VM, Zhang Y, Hughes TJR (2006) Isogeometric fluid-structure interaction analysis with applications to arterial blood flow. *Comput Mech* 38(4–5):310–322
- Bazilevs Y, Calo VM, Cottrell JA, Evans JA, Hughes TJR, Lipton S, Scott MA, Sederberg TW (2010) Isogeometric analysis using T-splines. *Comput Methods Appl Mech Eng* 199(5–8):229–263
- Becker A (1992) *The boundary element methods in engineering*. McGraw-Hill Book Company, New York
- Beer G, Marussig B, Zechner J (2015) A simple approach to the numerical simulation with trimmed CAD surfaces. *Comput Methods Appl Mech Eng* 285:776–790
- Benson DJ, Bazilevs Y, Hsu MC, Hughes TJR (2010) Isogeometric shell analysis: the Reissner–Mindlin shell. *Comput Methods Appl Mech Eng* 199(5–8):276–289
- Blandford GE, Ingraffea AR, Liggett JA (1981) Two-dimensional stress intensity factor computations using the boundary element method. *Int J Numer Methods Eng* 17(3):387–404
- Bonnet M, Maier G, Polizzoto C (1998) Symmetric Galerkin boundary element method. *Appl Mech Rev* 51:669–704
- Bordas S, Nguyen PV, Dunant C, Guidoum A, Nguyen-Dang H (2007) An extended finite element library. *Int J Numer Methods Eng* 71(6):703–732
- Bordas SPA, Rabczuk T, Zi G (2008) Three-dimensional crack initiation, propagation, branching and junction in non-linear materials by an extended meshfree method without asymptotic enrichment. *Eng Fract Mech* 75(5):943–960
- Bordas SPA, Duflo M (2007) Derivative recovery and a posteriori error estimate for extended finite elements. *Comput Methods Appl Mech Eng* 196(35–36):3381–3399
- Bordas S, Moran B (2006) Enriched finite elements and level sets for damage tolerance assessment of complex structures. *Eng Fract Mech* 73(9):1176–1201
- Borden MJ, Verhoosel CV, Scott MA, Hughes TJR, Landis CM (2012) A phase-field description of dynamic brittle fracture. *Comput Methods Appl Mech Eng* 217–220:77–95
- Bouchard PO, Bay F, Chastel Y, Toveni I (2000) Crack propagation modelling using an advanced remeshing technique. *Comput Methods Appl Mech Eng* 189(3):723–742
- Chang JH, Wu DJ (2007) Stress intensity factor computation along a non-planar curved crack in three dimensions. *Int J Solids Struct* 44(2):371–386
- Cisilino AP, Aliabadi MH (2004) Dual boundary element assessment of three-dimensional fatigue crack growth. *Eng Anal Boundary Elem* 28(9):1157–1173
- Cottrell B, Rice JR (1980) Slightly curved or kinked cracks. *Int J Fract* 16(2):155–169
- Crouch SL (1976) Solution of plane elasticity problems by the displacement discontinuity method. I. Infinite body solution. *Int J Numer Methods Eng* 10(2):301–343
- Davis BR, Wawrzynek PA, Carter BJ, Ingraffea AR (2016) 3-D simulation of arbitrary crack growth using an energy-based formulation—part II: non-planar growth. *Eng Fract Mech* 154:111–127
- De Luycker E, Benson DJ, Belytschko T, Bazilevs Y, Hsu MC (2011) X-FEM in isogeometric analysis for linear fracture mechanics. *Int J Numer Methods Eng* 87(6):541–565
- Deng J, Chen F, Li X, Hu C, Tong W, Yang Z, Feng Y (2008) Polynomial splines over hierarchical T-meshes. *Graph Models* 70(4):76–86
- Dokken T, Lyche T, Pettersen KF (2013) Polynomial splines over locally refined box-partitions. *Comput Aided Geom Des* 30(3):331–356
- Dominguez J, Ariza MP (2000) A direct traction BIE approach for three-dimensional crack problems. *Eng Anal Bound Elem* 24(10):727–738
- Dong L, Atluri SN (2013) Fracture & fatigue analyses: SGBEM-FEM or XFEM? part 2: 3D solids. *Comput Model Eng Sci* 90(5):3379–3413
- Duflo M, Bordas SPA (2008) A posteriori error estimation for extended finite elements by an extended global recovery. *Int J Numer Methods Eng* 76(8):1123–1138
- Eischen JW (1987) An improved method for computing the J2 integral. *Eng Fract Mech* 26(5):691–700
- Erdogan F, Sih G (1963) On the crack extension in plates under plane loading and transverse shear. *J Basic Eng* 85:519–527
- Feischl M, Gantner G, Praetorius D (2015) Reliable and efficient a posteriori error estimation for adaptive IGA boundary ele-

- ment methods for weakly-singular integral equations. *Comput Methods Appl Mech Eng* 290:362–386
- Frangi A (2002) Fracture propagation in 3D by the symmetric Galerkin boundary element method. *Int J Fract* 116(4):313–330
- Ghorashi S, Valizadeh N, Mohammadi S (2012) Extended isogeometric analysis for simulation of stationary and propagating cracks. *Int J Numer Methods Eng* 89(9):1069–1101
- González-Estrada OA, Ródenas JJ, Nadal E, Bordas SPA, Kerfriden P (2011) Equilibrated patch recovery for accurate evaluation of upper error bounds in quantities of interest. In: *Proceedings of V adaptive modeling and simulation (ADMOS)*
- González-Estrada OA, Nadal E, Ródenas JJ, Kerfriden P, Bordas SPA, Fuenmayor FJ (2014) Mesh adaptivity driven by goal-oriented locally equilibrated superconvergent patch recovery. *Comput Mech* 53(5):957–976
- Gosz M, Moran B (2002) An interaction energy integral method for computation of mixed-mode stress intensity factors along non-planar crack fronts in three dimensions. *Eng Fract Mech* 69(3):299–319
- Goury O (2015) Computational time savings in multiscale fracture mechanics using model order reduction. PhD thesis, Cardiff University
- Gravouil A, Moës N, Belytschko T (2002) Non-planar 3D crack growth by the extended finite element and level sets-part II: level set update. *Int J Numer Methods Eng* 53(11):2569–2586
- Gu J, Zhang J, Li G (2012) Isogeometric analysis in BIE for 3-D potential problem. *Eng Anal Bound Elem* 36(5):858–865
- Guiggiani M, Krishnasamy G, Rudolphi TJ, Rizzo FJ (1992) A general algorithm for the numerical solution of hypersingular boundary integral equations. *J Appl Mech* 59(3):604–614
- Heltai L, Arroyo M, DeSimone A (2012) Nonsingular isogeometric boundary element method for Stokes flows in 3D. *Comput Methods Appl Mech Eng*. 268:514–539. doi:10.1016/j.cma.2013.09.017
- Henshell RD, Shaw KG (1975) Crack tip finite elements are unnecessary. *Int J Numer Methods Eng* 9(3):495–507
- Hong H, Chen J (1988) Derivations of integral equations of elasticity. *J Eng Mech* 114(6):1028–1044
- Hughes TJR, Cottrell JA, Bazilevs Y (2005) Isogeometric analysis: CAD, finite elements, NURBS, exact geometry and mesh refinement. *Comput Methods Appl Mech Eng* 194(39–41):4135–4195
- Ingraffea AR, Grigoriu M (1990) Probabilistic fracture mechanics: a validation of predictive capability. Department of Structure Engineering, Cornell University, Report, pp 90–98
- Juhl P (1998) A note on the convergence of the direct collocation boundary element method. *J Sound Vib* 212(4):703–719
- Kaczmarczyk U, Nezhad MM, Pearce C (2014) Three-dimensional brittle fracture: configurational-force-driven crack propagation. *Int J Numer Methods Eng* 97(7):531–550
- Karihaloo BL, Xiao QZ (2001) Accurate determination of the coefficients of elastic crack tip asymptotic field by a hybrid crack element with p-adaptivity. *Eng Fract Mech* 68(15):1609–1630
- LaGreca R, Daniel M, Bac A (2005) Local deformation of NURBS curves. *Math Methods Curves Surf Tromso* 2004:243–252
- Lan M, Waisman H, Harari I (2013) A direct analytical method to extract mixed-mode components of strain energy release rates from Irwin's integral using extended finite element method. *Int J Numer Methods Eng* 95(12):1033–1052
- Li S, Mear ME, Xiao L (1998) Symmetric weak-form integral equation method for three-dimensional fracture analysis. *Comput Methods Appl Mech Eng* 151(3–4):435–459
- Liew KM, Cheng Y, Kitipornchai S (2007) Analyzing the 2D fracture problems via the enriched boundary element-free method. *Int J Solids Struct* 44(11–12):4220–4233
- Li K, Qian X (2011) Isogeometric analysis and shape optimization via boundary integral. *Comput Aided Des* 43(11):1427–1437
- Liu Y, Rudolphi TJ (1991) Some identities for fundamental solutions and their applications to weakly-singular boundary element formulations. *Eng Anal Bound Elem* 8(6):301–311
- Lutz E, Ingraffea AR, Gray LJ (1992) Use of 'simple solutions' for boundary integral methods in elasticity and fracture analysis. *Int J Numer Methods Eng* 35(9):1737–1751
- Martinez J, Dominguez J (1984) On the use of quarter-point boundary elements for stress intensity factor computations. *Int J Numer Methods Eng* 20(10):1941–1950
- Martin PA, Rizzo FJ (1996) Hypersingular integrals: how smooth must the density be? *Int J Numer Methods Eng* 39(4):687–704
- Marussig B, Zechner J, Beer G, Fries TP (2015) Fast isogeometric boundary element method based on independent field approximation. *Comput Methods Appl Mech Eng* 284:458–488
- Melenk JM, Babuška I (1996) The partition of unity finite element method: Basic theory and applications. *Comput Methods Appl Mech Eng* 139(1–4):289–314
- Mi Y, Aliabadi MH (1992) Dual boundary element method for three-dimensional fracture mechanics analysis. *Eng Anal Bound Elem* 10(2):161–171
- Mi Y, Aliabadi MH (1994) Discontinuous crack-tip elements: application to 3D boundary element method. *Int J Fract* 67(3):R67–R71
- Moës N, Dolbow J, Belytschko T (1999) A finite element method for crack growth without remeshing. *Int J Numer Methods Eng* 46(1):131–150
- Moës N, Gravouil A, Belytschko T (2002) Non-planar 3D crack growth by the extended finite element and level sets-part I: mechanical model. *Int J Numer Methods Eng* 53(11):2549–2568
- Mukherjee YX, Shah K, Mukherjee S (1999) Thermoelastic fracture mechanics with regularized hypersingular boundary integral equations. *Eng Anal Bound Elem* 23(1):89–96
- Muthu N, Falzon BG, Maiti SK, Khoddam S (2014) Modified crack closure integral technique for extraction of SIFs in meshfree methods. *Finite Elem Anal Des* 78:25–39
- Natarajan S, Song C (2013) Representation of singular fields without asymptotic enrichment in the extended finite element method. *Int J Numer Methods Eng* 96(13):813–841
- Nguyen VP, Kerfriden P, Bordas SPA (2014) Two- and three-dimensional isogeometric cohesive elements for composite delamination analysis. *Compos Part B Eng* 60:193–212

- Nikishkov GP, Park JH, Atluri SN (2001) SGBEM-FEM alternating method for analyzing 3D non-planar cracks and their growth in structural components. *Comput Model Eng Sci* 2(3):401–422
- Paluszny A, Zimmerman RW (2013) Numerical fracture growth modeling using smooth surface geometric deformation. *Eng Fract Mech* 108:19–36
- Partheymüller P, Haas M, Kuhn G (2000) Comparison of the basic and the discontinuity formulation of the 3D-dual boundary element method. *Eng Anal Bound Elem* 24(10):777–788
- Peake MJ, Trevelyan J, Coates G (2013) Extended isogeometric boundary element method (XIBEM) for two-dimensional Helmholtz problems. *Comput Methods Appl Mech Eng* 259:93–102
- Piegl L, Tiller W (1995) *The NURBS book*. Springer, Berlin
- Politis C, Ginnis AI, Kaklis PD, Belibassakis K, Feurer C (2009) An isogeometric BEM for exterior potential-flow problems in the plane. In: 2009 SIAM/ACM joint conference on geometric and physical modeling, SPM '09, ACM, New York, NY, USA, pp 349–354
- Portela A (2011) Dual boundary-element method: simple error estimator and adaptivity. *Int J Numer Methods Eng* 86(12):1457–1480
- Portela A, Aliabadi MH, Rooke DP (1992a) The dual boundary element method: effective implementation for crack problems. *Int J Numer Methods Eng* 33(6):1269–1287
- Portela A, Aliabadi MH, Rooke DP (1992b) Dual boundary element analysis of cracked plates: singularity subtraction technique. *Int J Fract* 55(1):17–28
- Rabczuk T, Bordas S, Zi G (2010) On three-dimensional modelling of crack growth using partition of unity methods. *Comput Struct* 88(23–24):1391–1411
- Rahimabadi AA (2014) Error controlled adaptive multiscale method for fracture in polycrystalline materials. PhD thesis, Cardiff University
- Rigby RH, Aliabadi MH (1998) Decomposition of the mixed-mode J-integral-revisited. *Int J Solids Struct* 35(17):2073–2099
- Ródenas JJ, González-Estrada OA, Tarancón JE, Fuenmayor FJ (2008) A recovery-type error estimator for the extended finite element method based on singular+smooth stress field splitting. *Int J Numer Methods Eng* 76(4):545–571
- Rudolphi TJ (1991) The use of simple solutions in the regularization of hypersingular boundary integral equations. *Math Comput Model*. 15(3–5):269–278
- Scott MA, Li X, Sederberg TW, Hughes TJR (2012) Local refinement of analysis-suitable T-splines. *Comput Methods Appl Mech Eng* 213–216:206–222
- Scott MA, Simpson RN, Evans JA, Lipton S, Bordas SPA, Hughes TJR, Sederberg TW (2013) Isogeometric boundary element analysis using unstructured T-splines. *Comput Methods Appl Mech Eng* 254:197–221
- Shivakumar KN, Raju IS (1992) An equivalent domain integral method for three-dimensional mixed-mode fracture problems. *Eng Fract Mech* 42(6):935–959
- Simpson R, Trevelyan J (2011) A partition of unity enriched dual boundary element method for accurate computations in fracture mechanics. *Comput Methods Appl Mech Eng* 200(1–4):1–10
- Simpson RN, Bordas SPA, Trevelyan J, Rabczuk T (2012) A two-dimensional isogeometric boundary element method for elastostatic analysis. *Comput Methods Appl Mech Eng* 209–212:87–100
- Simpson RN, Scott MA, Taus M, Thomas DC, Lian H (2013) Acoustic isogeometric boundary element analysis. *Comput Methods Appl Mech Eng* 269:265–290. doi:10.1016/j.cma.2013.10.026
- Smith DJ, Ayatollahi MR, Pavier MJ (2001) The role of T-stress in brittle fracture for linear elastic materials under mixed-mode loading. *Fatigue Fract Eng Mater Struct* 24(2):137–150
- Snyder MD, Cruse TA (1975) Boundary-integral equation analysis of cracked anisotropic plates. *Int J Fract* 11(2):315–328
- Sukumar N, Chopp DL, Béchet E, Moës N (2008) Three-dimensional non-planar crack growth by a coupled extended finite element and fast marching method. *Int J Numer Methods Eng* 76(5):727–748
- Sutradhar A, Paulino GH (2004) Symmetric Galerkin boundary element computation of T-stress and stress intensity factors for mixed-mode cracks by the interaction integral method. *Eng Anal Bound Elem* 28(11):1335–1350
- Sutula D, Bordas SPA (2013) Global energy minimization for all crack increment directions in the framework of XFEM. Internal report, University of Luxembourg
- Tanaka M, Sladek V, Sladek J (1994) Regularization techniques applied to boundary element methods. *Appl Mech Rev* 47(10):457–499
- Taus M, Rodin GJ, Hughes TJR (2015) Isogeometric analysis of boundary integral equations. ICES report 15–12
- Telles JCF (1987) A self-adaptive co-ordinate transformation for efficient numerical evaluation of general boundary element integrals. *Int J Numer Methods Eng* 24(5):959–973
- Ventura G, Xu JX, Belytschko T (2002) A vector level set method and new discontinuity approximations for crack growth by EFG. *Int J Numer Methods Eng* 54(6):923–944
- Verhoosel CV, Scott MA, de Borst R, Hughes TJR (2011) An isogeometric approach to cohesive zone modeling. *Int J Numer Methods Eng* 87(1–5):336–360
- Wang Y, Benson DJ, Nagy AP (2015) A multi-patch nonsingular isogeometric boundary element method using trimmed elements. *Comput Mech* 56(1):173–191
- Westergaard HM (1939) Bearing pressures and cracks. *J Appl Mech* 6:A49–A53
- Wyart E, Duflot M, Coulon D, Martiny P, Pardoën T, Remacle J-F, Lani F (2008) Substructuring FE-XFE approaches applied to three-dimensional crack propagation. *J Comput Appl Math* 215(2):626–638
- Yau JF, Wang SS, Corten HT (1980) A mixed-mode crack analysis of isotropic solids using conservation laws of elasticity. *J Appl Mech* 47:333–341
- Zamani NG, Sun W (1993) A direct method for calculating the stress intensity factor in BEM. *Eng Anal Bound Elem* 11(4):285–292