

See discussions, stats, and author profiles for this publication at: <https://www.researchgate.net/publication/339915254>

Sensitivity and identifiability of rheological parameters in debris flow modeling

Preprint · March 2020

DOI: 10.5194/nhess-2020-37

CITATIONS

0

READS

71

4 authors:



Gerardo Zegers

The University of Calgary

4 PUBLICATIONS 0 CITATIONS

SEE PROFILE



Pablo A. Mendoza

University of Chile

30 PUBLICATIONS 394 CITATIONS

SEE PROFILE



Alex Garces

University of Chile

4 PUBLICATIONS 0 CITATIONS

SEE PROFILE



Santiago Montserrat

University of Chile

16 PUBLICATIONS 159 CITATIONS

SEE PROFILE

Some of the authors of this publication are also working on these related projects:



Postdoctoral fellow, Center for Climate and Resilience Research (CR2) <www.cr2.cl> [View project](#)



Evaluating Land-surface and Hydrologic Response under Climate-changed Futures [View project](#)



Sensitivity and identifiability of rheological parameters in debris flow modeling

Gerardo Zegers^{1,2}, Pablo A. Mendoza^{1,3}, Alex Garces¹, and Santiago Montserrat¹

¹Advanced Mining Technology Center, Universidad de Chile

²Department of Geosciences, University of Calgary

³Department of Civil Engineering, Universidad de Chile

Correspondence: Santiago Montserrat (santiago.montserrat@amtc.cl)

Abstract.

Over the past decades, several numerical models have been developed to understand, simulate and predict debris flow events. Typically, these models simplify the complex interactions between water and solids using a single-phase approach and different rheological models to represent flow resistance. In this study, we perform a sensitivity analysis on the parameters of a debris flow numerical model (FLO-2D) for a suite of relevant variables (i.e., maximum flood area, maximum flow velocity, maximum flow velocity, deposit volume). Our aims are to (i) examine the degree of model overparameterization, and (ii) assess the effectiveness of observational constraints to improve parameter identifiability. We use the Distributed Evaluation of Local Sensitivity Analysis (DELSA) method, which is a hybrid local-global technique. Specifically, we analyze two creeks in northern Chile that were affected by debris flows on March 25, 2015. Our results show that SD and β_1 - a parameter related to viscosity - provide the largest sensitivities. Further, our results demonstrate that equifinality is present in FLO-2D, and that final deposited volume and maximum flood area contain considerable information to identify model parameters.

1 Introduction

In steep mountain environments, intense and localized storms can trigger the sudden movement of sediments, generating flash floods with solid volumetric concentrations up to 40 - 60 % (Takahashi, 1981; O'Brien, Jim S and Julien, 1988; Calvo and Savi, 2009). These events, also known as debris flows, differ from water floods because - in addition to fluid stress - solid-fluid and solid-solid interactions dominate the flow motion (Takahashi, 1981; Iverson et al., 1997). In recent years, debris flows have been recognized as a major natural hazard (Calvo and Savi, 2009), affecting infrastructure, economic activities and human life. For instance, debris flows events in Switzerland produced 24 fatalities and overall losses of US \$ 380 MM during the period 1972 - 2007 (Hilker et al., 2009). In Chile, estimated economic losses associated to the five biggest debris flow events recorded over 1980-2017, were at least US \$ 1.600 MM, with nearly 1,000 people dead or missing (Servicio Nacional de Geología y Minería, 2017).

Over the last decades, numerical models have emerged as a powerful tool to understand the behaviour and magnitude of debris flow events, since they allow the quantification of key variables used by engineers and decision-makers for risk management (Quan Luna et al., 2011; Frey et al., 2016; Calvo and Savi, 2009) and urban planning (Hürlimann et al., 2006;



25 Lucà et al., 2014; Naef et al., 2006; Arattano et al., 2006). However, the application of debris flow models requires several assumptions and simplifications that make results diverge from reality at various levels (Sosio et al., 2007). For example, uncertainties in terrain elevation models (e.g., satellite product, horizontal resolution), physical parameters (e.g., rheology parameters, solid concentration, and hydrological fluxes (e.g., precipitation, streamflow) used to force debris flow simulations can substantially impact relevant variables, such as flood area, sediment volumes, or maximum flow depth.

30 The use of debris flow models for practical problems typically requires the implementation of single-phase numerical models (Rickenmann et al., 2006; Naef et al., 2006) that solve 1D or 2D Saint Venant equations, using different rheological approaches to account for frictional stress (S_f). Many studies have reported good agreement between debris-flow model results and post-event measurements - e.g., run-out distance, flow velocity, deposit depth, flood area (D'Agostino and Tecca, 2006; Naef et al., 2006; Sosio et al., 2007; Rickenmann et al., 2006; Cesca and D'Agostino, 2008; Lin et al., 2011; Hungr, 1995). Nevertheless, 35 it is recognized that, because complex debris flow dynamics change in time and space (Coussot and Meunier, 1996), the appropriate choice of rheological parameters is critical for a good agreement between debris flow model output and field data (Sosio et al., 2007). In this context, various approaches have been adopted to characterize the sensitivity of debris flow model results to variations in model parameters - i.e., the coefficients in the model equations. For example, D'Agostino and Tecca (2006) compared FLO-2D (O'Brien and Garcia, 2009) simulations performed with two sets of rheological parameters 40 and three values of the laminar coefficient K (6 simulations in total), concluding that K controls the flood area and that rheological parameters control the maximum depth. Boniello et al. (2010) compared FLO-2D model results from a set of 12 back-calculated rheological parameters selected from previous studies, with another set of parameter values obtained from laboratory rheological analyses, finding a better representation of debris flow behavior with back-calculated parameters. Chow et al. (2018) conducted simulations with FLO 2D using 26 different sets of rheological parameters obtained from previous 45 studies, combined with different values of volumetric sediment concentration C_v , specific gravity G_s and the surface detention SD , a parameter used in FLO2D to represent flow detention. They found that the most important parameters were C_v , SD and β_1 , which characterizes fluid viscosity. All these studies used fixed sets of rheological parameters in their numerical experiments and, therefore, the relative importance of such coefficients on relevant simulated variables - specifically, flow depth, flow velocity, deposit volume, and flood area - remains unknown. Therefore, this paper addresses the following questions:

- 50
1. How sensitive are debris flow model results to uncertain - and typically fixed - rheological parameters?
 2. What are the most effective post-event measurements to constrain the parameter search towards more realistic simulations?

To answer these questions, we perform a sensitivity analysis on the parameters of a numerical debris flow model, and examine the effects of using post-event in-situ measurements on expected parameter ranges. In particular, we analyze a debris 55 flow event occurred in two creeks located in the Atacama region (northern Chile) during March 2015. Such event was the consequence of a heavy precipitation event over a three-day period, which exceeded 60 mm at several locations (Bozkurt et al., 2016), producing loss of human lives and massive infrastructure damage. Therefore, our intention is to provide guidance on the choice of uncertain rheological parameters, contributing to more reliable numerical simulations for debris flow risk assessments



and land use planning. The remainder of this paper is organized as follows: Section 2 describes the case study creeks and data, Section 3 describes the numerical debris flow model, sensitivity analysis and parameter search strategies; Section 4 presents the results and discussion, and Section 5 summarizes our main findings.

2 Study domain and data

We choose two nearby located ephemeral creeks in the upper Huasco River basin, Acerillas and La Mesilla (Fig. 1 (a)), where debris flows were triggered by an extreme precipitation event on March 24-26, 2015 (Bozkurt et al., 2016; Ortega et al., 2019). The Huasco Valley is a semi-arid fluvial system located at the southern edge of the Atacama region, Chile. This valley is characterized by perennial rivers that only exist in the trunk valleys, while tributaries only show ephemeral streams. In these areas, heavy rainfall events may induce catastrophic debris flows and mud-floods that greatly contribute to erosion (Aguilar et al., in review, 2019).

The Acerillas creek (15 km^2 , Figure 1 (b)) has a markedly narrow channel with almost none alluvial fan, allowing the transportation of sediments towards the El Carmen River. Post-event measurements indicate a deposited sediment volume of 6.000 m^3 (Cabr e et al., 2020) and a maximum flood area of 37.000 m^2 . Conversely, the La Mesilla creek ($2,5 \text{ km}^2$, Figure 1 (c)) is characterized by a big alluvial fan where considerable sedimentation occurs, and post-event measurements show a deposited sediment volume of 102.000 m^3 (Cabr e et al., 2020) and a maximum flood area of 246.500 m^2 . These flood areas were estimated by comparing pre- and post-event satellite Google Earth imagery. Also, a post-event topography lidar scan (acquired in Feb-March 2017 by the Chilean Ministry of Public Works) is available for this study. This dataset has a $1 \times 1 \text{ m}^2$ horizontal resolution, and was post-processed in order to eliminate vegetation and buildings.

Flow discharge data at the outlet of each creek were obtained from a distributed hydrological model, HEC-HMS version 4.2 (USACE, 2015). The model was configured for the entire Huasco River basin (7242 km^2), upstream the Santa Juana irrigation reservoir, as part of a debris flow mitigation project for the Chilean Ministry of Public Works. Hydrologic model simulations were forced using data from point measurements at 14 meteorological stations, spatially distributed with the inverse distance weighting (IDW) interpolation method (Teegavarapu et al., 2006). Total rainfall records range from 20 mm to 76 mm , with a maximum registered intensity of 16 mm hr^{-1} . The HEC-HMS model parameters were calibrated against hourly streamflow observed at two gauge stations located in the upper part of the basin - *R o El Carmen en El Corral* and *R o Conay en Las Lozas* (Fig. 2) - obtaining a Nash-Sutcliffe efficiency (NSE; Nash and Sutcliffe, 1970) of 0.78 for the former and 0.64 for the latter. Although all the other gauging stations were buried or destroyed by debris flows, simulated total water volumes were similar with those captured by the Santa Juana Reservoir - whose levels were low before the event. Estimated peak flow discharges for the event analyzed are $8 \text{ m}^3 \text{ s}^{-1}$ at La Mesilla and $12.7 \text{ m}^3 \text{ s}^{-1}$ at Acerillas.

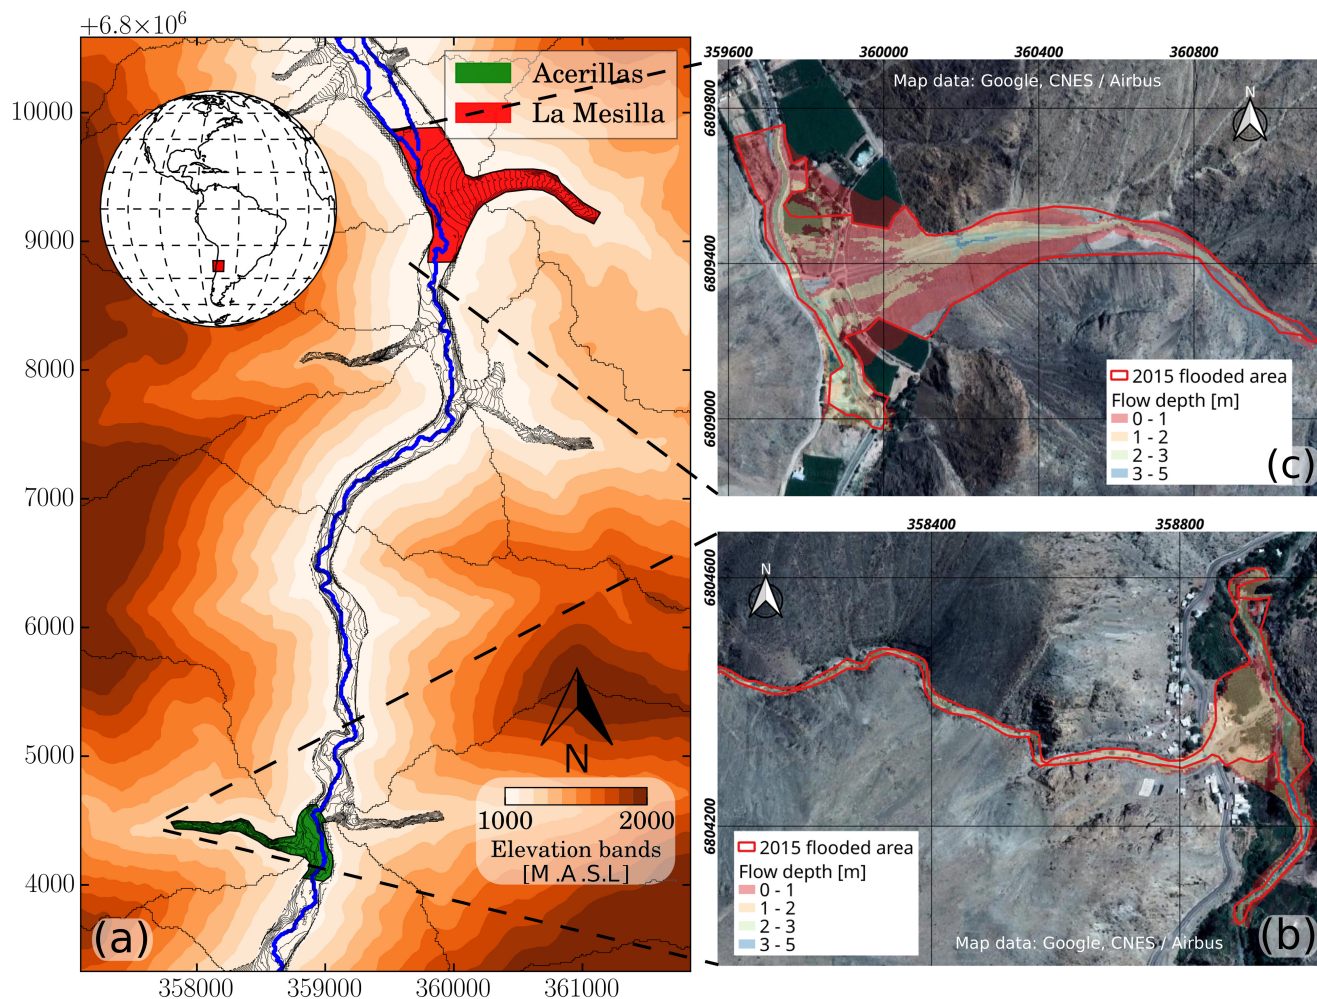


Figure 1. (a) Location of the two case study creeks and reference models results. The maximum observed flood areas and modeled flow depth (reference models) are shown for (b) Acerillas creek, and (c) La Mesilla creek. Elevations bands created from Satellite DEM 12 x 12 m: © JAXA/METI ALOS PALSAR L1.0 2007. Accessed through ASF DAAC 11 June 2017.

3 Methods

3.1 Debris flow model

90 We use the two-dimensional FLO-2D debris flow model (O'Brien, James S and Julien, Pierre Y and Fullerton, 1993), configured at a 10-m horizontal resolution. FLO-2D is a finite difference model that simulates water or debris flows in channels or unconfined surfaces. The governing equations solved by FLO-2D are the depth-averaged continuity and momentum conservation (Eqs. (1) and (2)), and the flood wave progression is controlled by topography and flow resistance (O'Brien, Jim

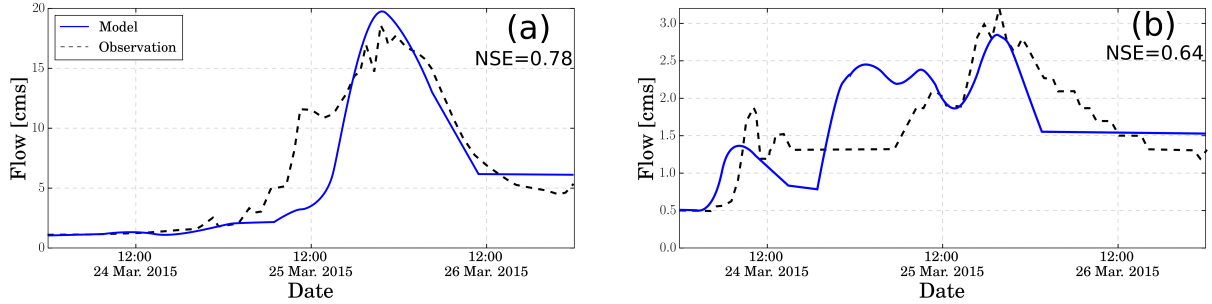


Figure 2. Calibration records for stream gauge stations (a) *Río El Carmen en El Corral* and (b) *Río Conay en Las Lozas*.

S and Julien, 1988). FLO-2D can also simulate debris-flows rheologies using a "quadratic" rheological model that combines
 95 components associated with creep, viscous, dispersive (collisions), and turbulent stresses (O'Brien, Jim S and Julien, 1988;
 O'Brien and Garcia, 2009; Naef et al., 2006). Based on this quadratic rheology, the friction slope, S_f , is estimated as (Eq. (3)):

$$\frac{\partial h}{\partial t} + \frac{\partial h V_x}{\partial x} + \frac{\partial h V_y}{\partial y} = 0 \quad (1)$$

$$S_{fx} = S_{ox} - \frac{\partial h}{\partial x} - \frac{V_x}{g} \frac{\partial V_x}{\partial x} - \frac{V_y}{g} \frac{\partial V_x}{\partial y} - \frac{1}{g} \frac{\partial V_x}{\partial t} \quad (2)$$

$$S_{fy} = S_{oy} - \frac{\partial h}{\partial y} - \frac{V_y}{g} \frac{\partial V_y}{\partial y} - \frac{V_x}{g} \frac{\partial V_y}{\partial x} - \frac{1}{g} \frac{\partial V_y}{\partial t}$$

$$S_f = \frac{\tau_y}{\gamma_m h} + \frac{K \eta V}{8 \gamma_m h^2} + \frac{n_{td}^2 V^2}{h^{3/4}} \quad (3)$$

100 where h is the local flow depth, t is time, V_x and V_y are depth-averaged velocity components along the x and y directions,
 g is gravitational acceleration, S_f the friction slope, S_o is the bed slope, τ_y is the yield stress, K a laminar strength param-
 eter, η the interstitial fluid dynamic viscosity, and n_{td} is the conventional Manning's roughness coefficient corrected by C_v
 ($n_{td} = 0.0538 n e^{6.0896 C_v}$ (O'Brien, Jim S and Julien, 1988)). O'Brien, James S and Julien, Pierre Y and Fullerton (1993) pro-
 105 posed the following empirical relationships to calculate the viscosity and yield stress as a function of the volumetric sediment
 concentration, c_v (Eqs. (4) and (5))

$$\eta = \alpha_1 e^{\beta_1 c_v} \quad (4)$$

$$\tau_y = \alpha_2 e^{\beta_2 c_v} \quad (5)$$

where $\alpha_{1,2}$ and $\beta_{1,2}$ are experimentally defined empirical coefficients (O'Brien, James S and Julien, Pierre Y and Fullerton,
 1993; O'Brien and Garcia, 2009).



110 3.2 Sensitivity analysis

Sensitivity analysis (SA) is a powerful tool to characterize the effects of variations in input factors on environmental model responses (Razavi and Gupta, 2015; Gupta and Razavi, 2018). When the factors of interest are the model parameters, SA helps to identify those that are redundant for the modeling purposes, contributing to a more efficient parameter search (Mendoza et al., 2015). Different types of SA techniques have been proposed in the literature depending on specific objectives, or even
 115 the meaning of sensitivity (see, for example, reviews by Razavi and Gupta (2015); Pianosi et al. (2016)).

In this work, we apply the DELSA method (Rakovec et al., 2014) to identify the parameters that have the largest impact on simulated debris flow variables. DELSA is a frugal local-global hybrid technique, that provides first-order sensitivity indices across the parameter space. These measures are obtained using local gradients that quantify the sensitivity of a modeled output, Ψ , relative to individual variations of a parameter θ_j . The local gradients, $\frac{\partial \Psi}{\partial \theta_j}|_k$, are used to compute the first-order sensitivity
 120 of each parameter j at each point k of the parameter space:

$$S1_k^j = \frac{|\frac{\partial \Psi_{kj}}{\partial \theta_j}|^2 \frac{1}{12} (\theta_{i,max} - \theta_{i,min})^2}{V_K(\Psi)} \quad (6)$$

where $V_K(\Psi)$ is the total local variance at point k :

$$V_K(\Psi) = \sum_{j=0}^J |\frac{\partial \Psi_{kj}}{\partial \theta_j}|^2 \frac{1}{12} (\theta_{i,max} - \theta_{i,min})^2 \quad (7)$$

The first-order sensitivity measures, $S1_k^j$, vary between 0 and 1, and the sum of first-order sensitivities from all parameters
 125 is equal to 1 at each sample point. In this work, parameter sampling is performed using the Latin hypercube sampling (LHS) method. LHS is a statistical method to generate an almost random sample of parameter values from a multidimensional distribution, and has proven to be more efficient than other methods like Monte Carlo sampling (Olsson et al., 2003; Olsson and Sandberg, 2002).

Local sensitivities can be analyzed in a disaggregated manner - through their cumulative frequency distribution across the
 130 parameter space -, or aggregated by computing a specific statistical property - e.g., the median of all local sensitivity measures for a particular pair of parameter and target variable. We use both approaches to analyze SA results.

In this paper, we focus on the effects of debris flow model parameters on four response variables: maximum average runoff speed $V_{mean} m s^{-1}$, maximum average runoff height $H_{mean} m$, maximum flood area $A_{max} m^2$, and deposited volume $Vol_{dep} m^3$. These response variables are calculated using the outputs from FLO-2D as:

$$135 V_{mean} = \sum_{j=0}^{N_{WC}} V_{max}(j) / N_{WC} \quad (8)$$



$$H_{mean} = \sum_{j=0}^{N_{WC}} H_{max}(j) / N_{WC} \quad (9)$$

$$A_{max} = \sum_{j=0}^{N_{WC}} dx * dy \quad (10)$$

$$Vol_{dep} = \sum_{j=0}^{N_{WC}} H_{final}(j) dx * dy \quad (11)$$

where j is the cell index, N_{WC} is the total number of wet cells ($h > 0$), dx and dy indicate the cell size along the x and y axis (numerical grid); $V_{max}(j)$, $H_{max}(j)$ and $H_{final}(j)$ are the maximum flow speed, maximum flow depth and final runoff height of the cell j respectively

The FLO-2D parameters considered for DELSA are those that describe the fluid rheology (Table 1): $\alpha_{1,2}$, $\beta_{1,2}$, C_v , K , n , the SD parameter and the total volume of sediments mobilized V_T .

The detention coefficient, SD , is a model parameter that reproduces flow detention. However, there is little information in the literature on how this parameter operates. Past studies D'Agostino and Tecca (2006) suggest that SD acts as a minimum depth for flow routing (or non - flow condition). However, modeled flow depth can be lower than SD , suggesting that a second restriction exists for flow detention, probably related with flow velocity. D'Agostino and Tecca (2006) noted that this coefficient has a strong influence on the results and it can be used as a surrogate of the rheology. The total sediment volume mobilized (V_{Test}) by each debris flow event was estimated with the equation proposed by Chang et al. (2011) (Eq. (12)):

$$V_{Test} = 0.023A_w + 0.064A_L + 13264.6GI - 1399.2D + 38.47C_R \quad (12)$$

where A_w is the watershed area, A_L the landslide area (zero in these cases), GI the geological index (where a value of 2.5 is assumed based on a study zone report made for the Chilean Ministry of Public Works), D rainfall duration ($D = 48$ hours for this event) and C_R the cumulative rainfall ($C_R = 76$ mm). We obtain V_{Test} values of $185000 m^3$ for Acerillas and $154000 m^3$ for La Mesilla.

Debris flow concentration is assumed to vary with streamflow between a minimum concentration $C_{vmin} = 0.1 - 0.4$ to a maximum concentration C_{vmax} at the time of peak flow, which is treated as a model parameter. To this end, we propose the following function for C_v :

$$C_v(t) = \begin{cases} \frac{(C_{vmax} - C_{vmin}) \cdot erf((Q(t) - Q_m) / (Q_{max} - Q_m) \cdot \phi) \cdot (C_{vmax} - C_{vmin})}{((C_{vmax} - C_{vmin}) \cdot erf((Q_{max} - Q_m) / (Q_{max} - Q_m) \cdot \phi))} + C_{vmin}, & \text{if } Q(t) / Q_{mean} \geq 0.5 \\ C_{vmin}, & \text{if } Q(t) / Q_{mean} < 0.5 \end{cases} \quad (13)$$



Table 1. Values range of the model parameters.

Parameter	MIN	MAX	Units	Reference
α_1	0,00030	0,06480	<i>poises</i>	Sosio et al. (2007); O'Brien, Jim S and Julien (1988)
β_1	6,20	33,10	-	O'Brien, Jim S and Julien (1988)
α_2	0,00071	0,15200	<i>dynes cm⁻²</i>	O'Brien, Jim S and Julien (1988); D'Agostino and Tecca (2006)
β_2	16,90	29,80	-	O'Brien, Jim S and Julien (1988)
C_{vmax}	0,45	0,60	-	Sosio et al. (2007); O'Brien, Jim S and Julien (1988)
n	0,01	0,2	-	Rickenmann et al. (2006)
K	24	2000	-	O'Brien and Garcia (2009)
SD	0,1	1,5	-	O'Brien and Garcia (2009); D'Agostino and Tecca (2006)
V_T	70% $V_{T_{est}}$	130% $V_{T_{est}}$	m^3	Chang et al. (2011)
τ_y	153,6	35.000,0	<i>dynes cm⁻²</i>	O'Brien, Jim S and Julien (1988); Rickenmann et al. (2006)
η	1,1	100.000,0	<i>poises</i>	O'Brien, Jim S and Julien (1988); Rickenmann et al. (2006)

where ϕ is a coefficient that changes the shape of the concentration curve. ϕ and C_{vmin} are calculated in order to match the
 160 total volume and minimize C_{vmin} value:

$$\begin{aligned} &\text{minimize } C_{vmin} \\ &\text{subject to } \int_{t=0}^T C_v(t) \cdot Q(t) \cdot dt = V_T \end{aligned} \quad (14)$$

Rheological parameter ranges are obtained from previous debris-flow studies (O'Brien, Jim S and Julien, 1988; Boniello
 et al., 2010; D'Agostino and Tecca, 2006; Sosio et al., 2007; Rickenmann et al., 2006; Chang et al., 2011; O'Brien and Garcia,
 2009) and are summarized in Table 1. However, additional restrictions are imposed for τ_y and η , with maximum values of
 165 35,000 *dynes cm⁻²* and 100,000 *poises*, respectively (Rickenmann et al., 2006). Since τ_y and η are function of rheological
 parameters (Eqs (5) and (4)), such limits impose restrictions for $\alpha_{1,2}$, $\beta_{1,2}$ and C_{vmax} that we ensure to implement in DELSA.
 To this end, we develop a Python script that allows running FLO-2D in parallel and sequentially, reducing computational cost
 considerably. For V_T , we assume a range of variation of $\pm 30\%$ respect to estimated values (Eq. (12)).

3.3 Parameter Selection via Constrained Search

170 We explore the effects of parameter uncertainty on simulated debris flow variables at the two case study creeks. We also
 examine the utility of using reference values for specific variables to constrain the search of physically plausible parameter
 sets. Such values are obtained from a reference simulation conducted by Zegers (2017), who validated a FLO-2D debris flow
 model at Acerillas and La Mesilla creeks using data from the 2015 flood event. Zegers (2017) calibrated model parameters by
 contrasting results against measured flood areas, deposited volumes and flow velocity estimated from a video captured with
 175 a cell phone by a local person at Acerillas. Such validation strategy has provided reliable results for several other creeks in



Table 2. Parameter values for reference models on (Zegers, 2017).

α_1 <i>poises</i>	β_1 —	α_2 <i>dynes cm⁻²</i>	β_2 —	Cv_{max} —	n —	K —	SD —	V_T <i>m³</i>
0,0075	14,39	0,152	18,7	0,55	0,07 flood plains 0,05 main channel	2600	1	185.000 for Acerillas 154.000 for La Mesilla

the area. Parameter values used for the reference simulation are provided in Table 2. Modeled flood areas and maximum flow depth are shown in Fig. 1, and discrepancies with respect to observations can be attributed to the use of post-event topography.

Based on the reference simulation, we choose reference values of $V_{mean} = 1 \text{ m s}^{-1}$ and $H_{mean} = 1.5 \text{ m}$ at both creeks. Additionally, we estimate the reference maximum flood area using Google Earth Imagery - obtaining values of 246500 [m^2] for La Mesilla, and 37000 [m^2] for Acerillas -, and use deposited sediment volumes reported by Cabré et al. (2020) as reference values, which correspond to 102000 [m^3] and 6000 [m^3] for La Mesilla and Acerillas, respectively.

4 Results and discussion

4.1 Choice of sample size

First, we seek to identify the minimum sample size, N_k , for which stable DELSA results can be obtained in order to minimize computational cost (Rakovec et al., 2014). Therefore, we explore the effects of the choice of N_k on the cumulative frequency distributions (CDFs) of DELSA first order sensitivity indices. Since we include $N_j = 9$ parameters, the total number of simulations required for each case is $N_t = (N_j + 1)N_k$. Figure 3 illustrates the sensitivity of DELSA results to variations in sample size, N_k , for four variables simulated by FLO-2D, with respect to parameters β_1 and Cv_{max} , at the Acerillas creek. Since the curves obtained for $N_k = 500$ and $N_k = 1000$ show slight differences, departing from the CDF for $N_k = 100$, we conclude that a sample size of $N_k = 500$ is adequate for further analyses. The sensitivity of DELSA results to N_k was also examined at La Mesilla creek, obtaining the same conclusion regarding sample size (not shown).

Figure 3 also shows that, depending on the target variable and parameter analyzed, first-order sensitivity indices can be highly heterogeneous across the parameter space. In particular, the modeled response is highly sensitive to variations of β_1 , with first-order sensitivities larger than 0.2 for approximately 60% of cases, and sensitivities greater than 0.5 for 20% -40% depending on the variable analyzed. On the other hand, the modeled variables are less sensitive to Cv_{max} in most cases, with DELSA indices smaller than 0.1 for approximately 70% of the parameter sets.

4.2 Sensitivity of model responses to model parameters

Figure 4 displays the median of the full frequency distribution (obtained with $N_k = 500$) of local first order sensitivity indices for the two study domains: (i) Acerillas creek (ACE), and (ii) La Mesilla creek (MES). The uncertainty bands are obtained by performing bootstrapping with replacement (resampled 1000 times). In general, β_1 provides the largest sensitivities for the simulated variables analyzed, which means that the fluid rheology, in particular the viscosity coefficient ($\eta = \eta(\beta_1)$), is a main

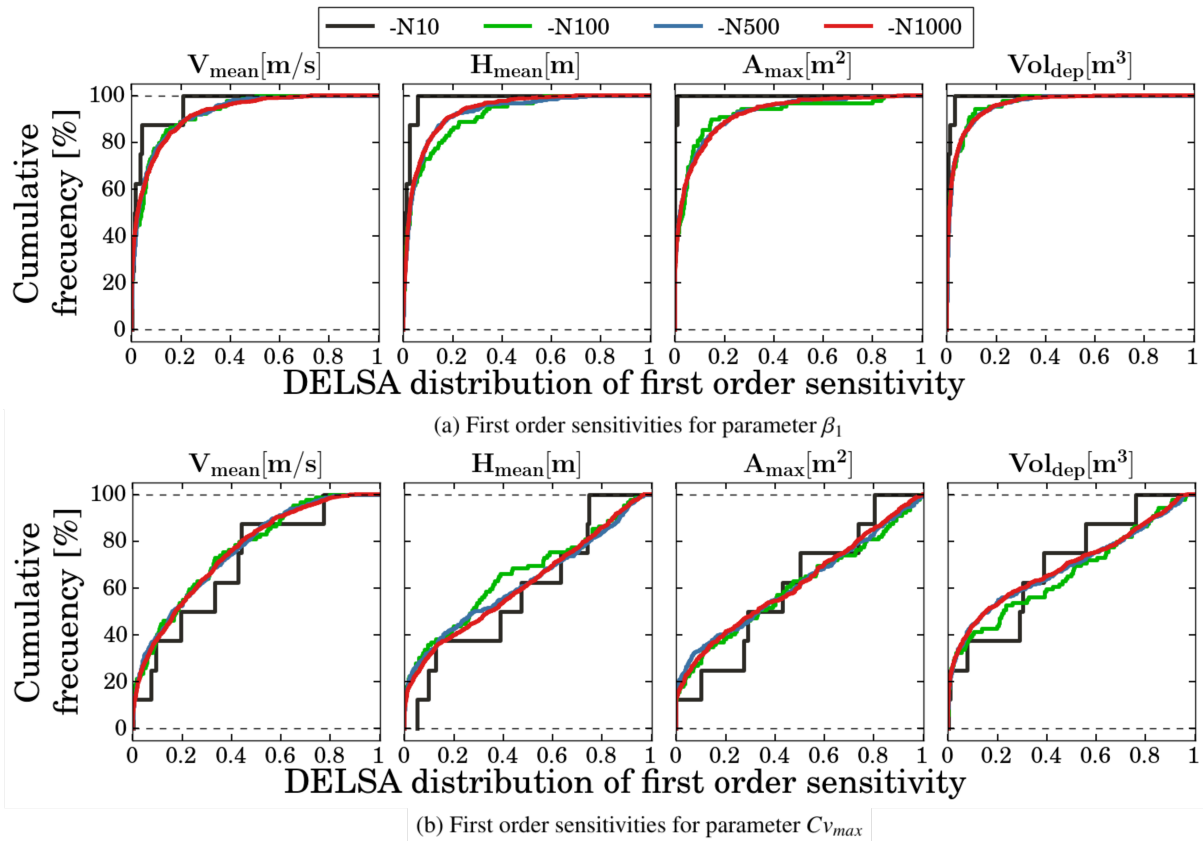


Figure 3. Effects of sample size N_k on the cumulative distribution function (CDF) of DELSA indices for (top) parameter β_1 , and (bottom) parameter Cv_{max} . These results illustrate the effects of parameter on flow velocity, flow depth, flood area, and deposited volume the Acerillas creek.

parameter controlling flow behaviour. Moreover, Acerillas' results show to be more sensitive than those obtained at La Mesilla with respect to β_1 . This could be better explained when analysed together with SD , the detention coefficient.

As expected, the simulated deposited volume Vol_{dep} is very sensitive to SD because this parameter controls flow detention. For the remaining simulated variables, SD also rises as an important parameter at La Mesilla, but shows secondary importance at Acerillas, which can be explained by catchment differences. While the fluid rheology explains flow behavior at the Acerillas creek (mainly sensitive to β_1), depositional or detention processes - represented by SD - gain importance across the larger alluvial fans of La Mesilla creek.

Another parameter that provides large sensitivities in simulated variables is the total sediment volume, V_T , especially in the mean flow velocity, V_{mean} , whose sensitivity indices are of the same order of magnitude to those produced by β_1 . However, V_T does not produce large variations in the total deposited volume. As deposition occurs, the flow is channelized between the deposited margins, preventing flow spreading. For example, when increasing SD values, A_{max} decreases as flows are forced

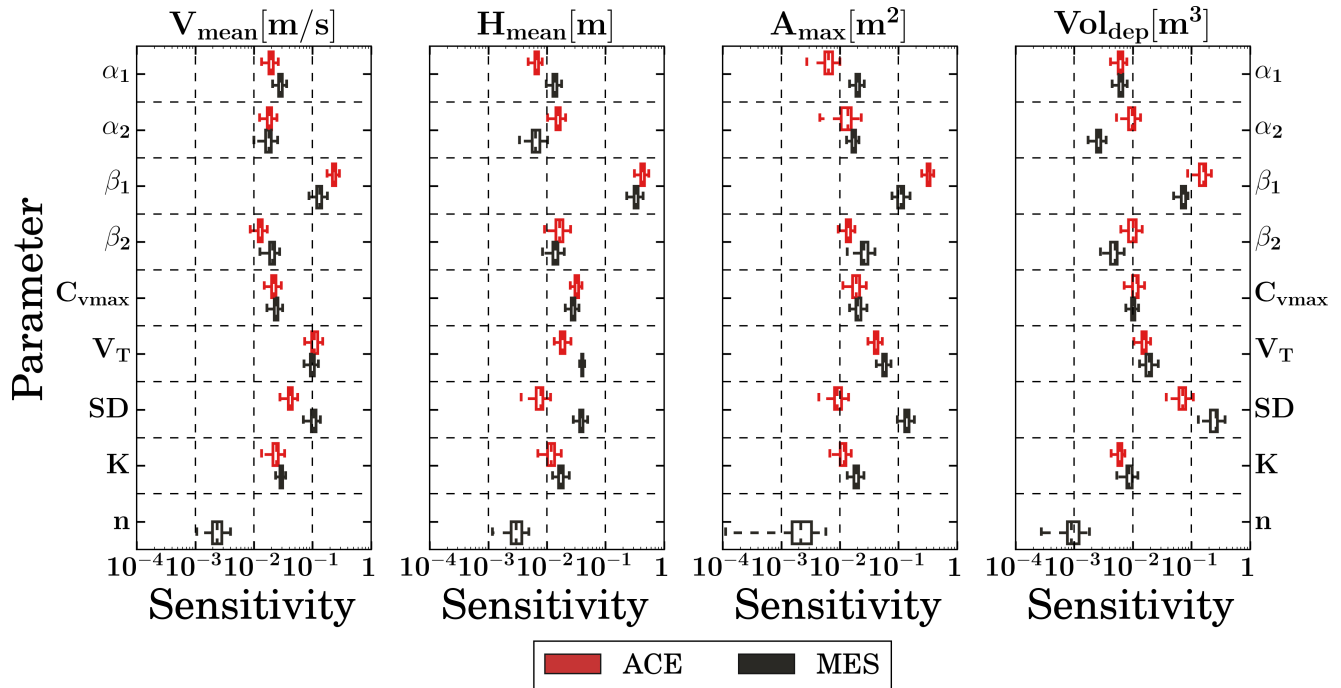


Figure 4. DELSA sensitivity indices (synthesized as the median from the cumulative frequency distribution) for all parameters and model responses. Results are displayed for Acerillas (red) and La Mesilla (black) creeks, and the sampling uncertainty (bootstrapping with 1000 times resampling) is indicated by boxplots. The vertical bold line in the boxplot is the median, the body of each boxplot shows the interquartile range (Q75 - Q25) and the whiskers represent the sample minima and sample maxima. DELSA indices are displayed in log space for a better visualization of inter-parameter differences.

to stop at deeper heights. However, this could be a structural weakness of FLO-2D, which lacks proper representations of complex depositional and dewatering processes.

215 Although sediment concentration is one of the main parameters controlling debris flow rheology, model results are insensitive to C_{vmax} . This is explained by its small range of variation compared to the feasible range of β_1 , both parts of the exponential terms controlling fluid viscosity in Eq. (4). However, DELSA sensitivity indices associated with parameters determining yield stress (τ_y) and Manning's roughness coefficient - both describing flow rheology -, are of second-order importance. In particular, model results are insensitive to Manning's roughness coefficient.

220 4.3 Parameter uncertainty effects

Figure 5 shows the full range of variation in model responses (produced by $N_k = 500$ parameter sets), normalized by reference values obtained from post-event measurements (Vol_{dep} and A_{max}) and results obtained from the reference models (for H_{mean} and V_{mean}). These are compared with the simulated ensemble that results from screening model outputs imposing five different



observational constraints: (i) $\pm 20\%$ reference mean flow velocity (FVEL), (ii) $\pm 20\%$ reference mean flow depth (FH), (iii)
 225 $\pm 20\%$ reference maximum flood area (FAREA), (iv) $\pm 40\%$ reference volume deposit (FVOL), and (v) $\pm 20\%$ reference
 maximum flood area and $\pm 40\%$ reference volume deposit (FAREAVOL). To be clear, constraint (i) results from keeping all
 those parameter sets that provide a simulated mean flow velocity within the range $0.8V_{ref} - 1.2V_{ref}$. Constraints (ii)-(iv) work
 in a similar way for other observed variables, while constraint (v) filters all parameter sets that simultaneously provide flood
 areas and deposit volumes within the ranges $0.8A_{ref} - 1.2A_{ref}$ and $0.6VOL_{ref} - 1.4VOL_{ref}$, respectively. We assume a
 230 weaker observational constraint in the case of the deposited volume because of possible uncertainties associated to different
 measurements techniques.

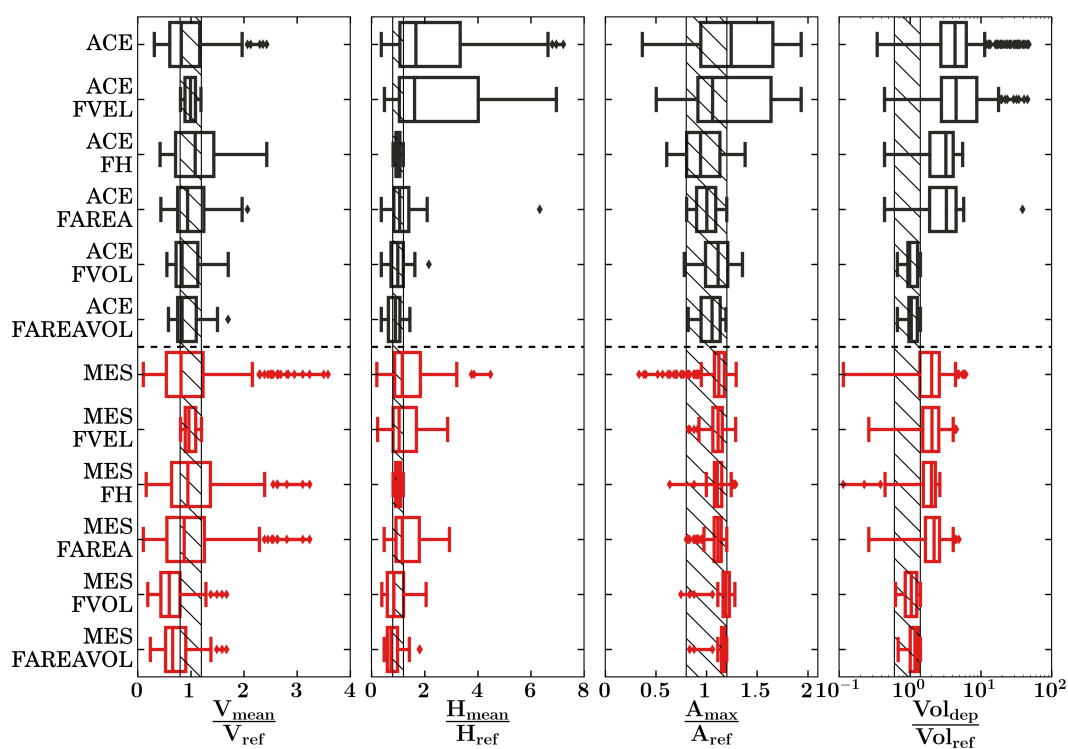


Figure 5. Effects of parametric uncertainty in normalized model responses for the original parameter sample (top panels) and alternative observational constraints: flow velocity (FVEL), flow depth (FH), flood area (FAREA), and sediment volume (FVOL), and joint area-volume constraint (FAREAVOL). Results are displayed for Acerillas (black) and La Mesilla (red) creeks. The hatched area for V_{mean} , H_{mean} and A_{max} corresponds to $\pm 20\%$ of their reference values, and for VOL_{dep} to $\pm 40\%$ of the estimated sediment volume. The vertical bold line in the boxplots is the median, the body of each boxplot shows the interquartile range (Q75 - Q25) and the whiskers represent the sample minima and sample maxima.

Figure 5 also shows that, in general, the effects of parametric uncertainty on simulated variables are considerable, and the ensemble median can be substantially different from the reference boundaries. This is somewhat expected, since the literature



provides large ranges for model parameters (see Table 1 for details). Overall, uncertainties arising from the original parameter
235 samples (top panels) are larger in Acerillas, except for mean flow velocity. This could be explained by the larger sensitivity
of flow velocity to flow rheology, while the rest of simulated variables are more sensitive to deposition processes, mainly
represented by SD .

Most simulations overestimate deposited volumes and flow depth, especially at Acerillas. For flow velocity, the ensemble
of parameter sets provides mixed results in both creeks, with underestimation in most cases (median values lower than the
240 reference values); however, there are still several parameter sets that produce an overestimation of flow velocity. The results
obtained for maximum area reveal differences among both creeks: in Acerillas, most parameter sets tend to overestimate the
flood area, whereas most simulated values are within the expected range at La Mesilla. This could happen because $V_{ol_{dep}} \ll$
 V_T at Acerillas, while $V_{ol_{dep}} \sim V_T$ at La Mesilla; moreover, the maximum flood area at La Mesilla is approximately six
times larger than in Acerillas. Thus, small variations in $V_{ol_{dep}}$ imply important fractional changes with respect to the volume
245 reference values at Acerillas.

Fig. 5 shows that the velocity constraint "FVEL" does not have an impact on the rest of simulated variables. Nevertheless,
the application of alternative observational constraints helps to reduce the spread of the remaining variables. For example, the
height filter "FH" improves simulations of maximum flood area, although it does not have much effect on velocity or deposit
volume. The area restriction, "FAREA", improves simulated flow depth only at Acerillas, as most of the original ensemble
250 members were already inside the expected reference boundaries at La Mesilla. The volume constraint "FVOL" reduces the
uncertainty in all variables, with the smallest improvement for flow velocity. This is because the volume is directly linked
to flow height and flood area, but not to flow velocity. Finally, the largest reductions in ensemble spread are obtained when
parameter sets are constrained by using area and volume observations (FAREAVOL).

The maximum flood area and deposited volume are relatively easy to measure, and are probably the most used post-event
255 measurements for calibrating debris flows models (Chow et al., 2018; Cesca and D'Agostino, 2008; D'Agostino and Tecca,
2006; Sosio et al., 2007; Frey et al., 2016; Quan Luna et al., 2011).

4.4 Parameter identifiability

Figure 6 illustrates the effects of applying observational constraints, specifically flood area and deposited volume constraints,
on parameter identifiability. Results show that the resampled values of $\alpha_{1,2}$, β_2 , C_{vmax} , V_T , K and n cover practically the
260 entire original range. However, the application of observational restrictions provides substantial reductions in the ranges of
 β_1 and SD , which mainly explain the flow rheology and depositional processes in our study areas. Further, lower parameter
values are obtained in comparison to the full range, especially SD at the Acerillas creek. These results indicate that viscosity
 $\eta = \eta(\alpha_1, \beta_1, C_{vmax})$ is the most restricted parameter when applying these constraints, discarding all medium-high values. On
the other hand, re-sampled values of $\tau_y = \tau_y(\alpha_2, \beta_2, C_{vmax})$ cover almost the entire original range.

265 The reference SD -value is close to the upper range in La Mesilla after applying constraint FAREVOL, and also much
larger than the resulting maximum values filtered at Acerillas. This result is somewhat expected, since, SD does not provide
large model sensitivities in that domain. Similarly, the reference β_1 value is within the upper range of filtered values ($> Q75$).

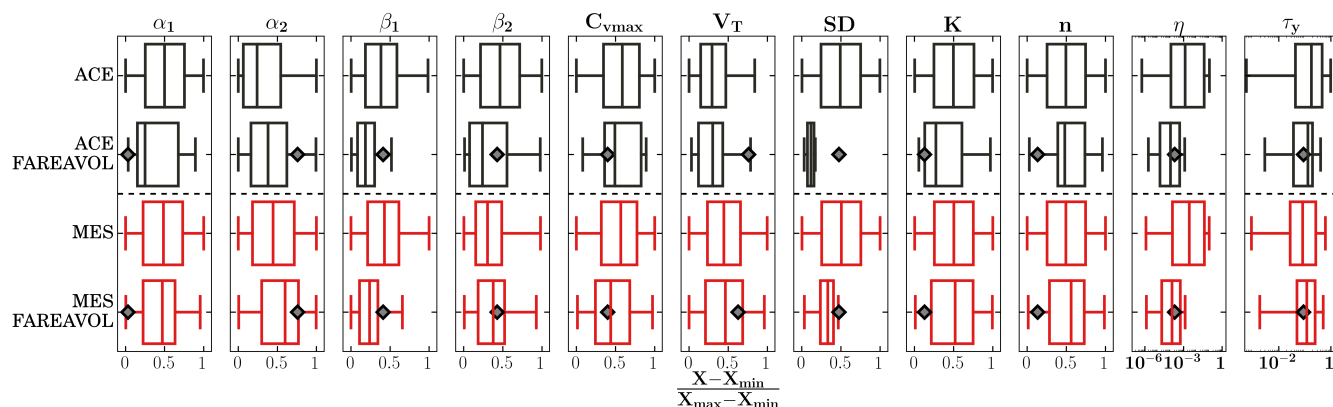


Figure 6. Effects of applying a flood area-volume observational constraint (FAREAVOL) on parameter identifiability. Results are displayed for Acerillas (black) and La Mesilla (red) creeks. The vertical bold line in the boxplots is the median, the body of each boxplot shows the interquartile range ($Q_{75} - Q_{25}$) and the whiskers represent the sample minima and sample maxima. The grey-black diamonds represent parameter values for the reference simulations.

However, filtered η -values around the baseline model parameter result from the compensation of low values of α_1 (near the minimum in the filtered range) and C_{vmax} (below the median of filtered values). A similar effect is observed for τ_y , whose filtered range results from the compensation of α_2 , β_2 and C_{vmax} . In summary, different combinations of $\alpha_{1,2}$, $\beta_{1,2}$, and C_v can generate viscosity and yield stress values that are suitable to reproduce the 2015 debris flow events in Acerillas and La Mesilla. This is a well-known problem in environmental models - referred to as equifinality, nonuniqueness or nonidentifiability of model parameters - that has been widely discussed for more than three decades in the hydrology literature (e.g., Beven 2006; Kelleher et al., 2017), but not carefully addressed in the debris flow modeling community.

Figure 6 also shows different behavior in other parameters. For example, the reference values for K and n are in the lower range of the filtered ensembles, while the reference V_T is in the upper body of the boxplot. Low K -values produce low S_{f2} , the second term at the right hand of Eq. (3), representing viscous stress. This could be compensated with larger values of SD , as in the reference model. These results demonstrate that equifinality in FLO-2D does not only involve rheological parameters, and that SD could be an important parameter to correct unrealistic model representation of rheology (D'Agostino and Tecca, 2006).

5 Summary and conclusions

We performed a sensitivity analysis on the parameters of a widely used numerical debris flow model (FLO-2D) and assess the effects of applying observational constraints on parameter identifiability. Our study domains are two morphologically different ravines, *Acerillas* and *La Mesilla*, located in the Atacama region, Chile. While *Acerillas* is characterised by a straight and well defined channel with almost non alluvial fans, *La Mesilla* has a big alluvial fan where deposition is prone to occur.



We found that β_1 , a parameter used to estimate the fluid mixture viscosity, provides the largest sensitivities in the variables analyzed followed by SD , a model parameter used to represent flow detention. Interestingly, the relative importance of β_1 and SD depends on the study site, being the former more important for Acerillas and the latter for La Mesilla. These results suggest that, while rheological processes dominate flow behaviour at Acerillas (straight channel with small alluvial fan), sedimentation and detention processes control flow in La Mesilla (big alluvial fan). Additionally, the total mobilized sediment V_T is an important parameter for representing flow velocity, which is in line with previous evidence that higher flow volumes reduced effective friction coefficients in granular flows, increasing the overall fluid mobility (Johnson et al., 2016; Monserrat et al., 2016). Model results show to be almost insensitive to n , while DELSA sensitivities for the remaining parameters are of second order importance and provide similar indices.

The comparison between the original model parameter ranges ($N = 500$) and the ensemble resulting from applying observational restrictions shows that SD and β_1 (i.e. η) are the parameters whose identifiability is mostly improved, while others practically preserve their original range. In addition, we obtain that different combinations of model parameters (including those that describe rheology) can provide very similar results, indicating that equifinality is present in FLO-2D. Our results also support the idea that single phase rheological models lack a strong physical basis (Iverson, 2003) and, therefore, their determination requires expert knowledge. However, an encouraging finding is that the final deposited volume (VOL_{dep}) and maximum flood area (A_{max}) contain considerable information to identify model parameters.

We obtain that SD strongly affects model results at La Mesilla, having also large effects on simulated deposited volumes at Acerillas. Moreover, this study provides evidence that SD is one of the most important parameters controlling flow behaviour, and could possibly surrogate rheology in the model (D'Agostino and Tecca, 2006). One-phase debris flows models still lack robust representations of complex process interactions during flow stopping that produce temporal and spatial changes in fluid rheology. Thus, these rheological changes have been replaced by simpler approaches (e.g., the incorporation of SD). Future work should advocate for improving debris flow models by incorporating better approaches to simulate deposition/erosion, stopping phases, and changing rheologies.

Author contributions. G.Z, A.G, P.M and S.M were involved on the conceptualization. G.Z, P.M and S.M contributed to the methodology, analysis and drafted the manuscript. G.Z configured the model, conducted all simulations, analyzed the results and made the figures. G.Z, A.G, P.M and S.M contributed to writing - original draft. G.Z, P.M and S.M performed the writing - review & editing.

Competing interests. The authors declare that they have no conflict of interest.

Acknowledgements. The authors thank Tomás Gómez and Miguel Lagos for providing the streamflow data used for this study. We also thank the support of the Engineering Faculty of Universidad de Chile through the Advanced Mining Technology Center (AMTC), the Department



315 of Civil Engineering and IDIEM. The authors also thanks to the Public Work Ministry and the CONICYT/PIA Project AFB180004. PAM acknowledges support from Fondecyt postdoctoral grant No. 3170079.



References

- Aguilar, G., Cabré, A., Fredes, V., and Vilella, B.: Erosion after an extreme storm event in an arid fluvial system of the southern Atacama Desert: an assessment of magnitude, return time, and conditioning factors of erosion caused by debris flows, *Natural Hazards and Earth System Sciences Discussions*, 2019, 1–26, <https://doi.org/10.5194/nhess-2019-239>, in review, 2019.
- Arattano, M., Franzi, L., Marchi, L., Arattano, M., Franzi, L., Influence, L. M., and Hazards, N.: Influence of rheology on debris-flow simulation, *Natural Hazards and Earth System Science*, pp. 519–528, <https://doi.org/hal-00299320>, 2006.
- Boniello, M. A., Calligaris, C., Lapasin, R., and Zini, L.: Rheological investigation and simulation of a debris-flow event in the Fella watershed, *Natural Hazards and Earth System Science*, 10, 989–997, <https://doi.org/10.5194/nhess-10-989-2010>, 2010.
- Bozkurt, D., Rondanelli, R., Garreaud, R., and Arriagada, A.: Impact of warmer eastern tropical Pacific SST on the March 2015 Atacama floods, *Monthly Weather Review*, 144, 4441–4460, 2016.
- Cabré, A., Aguilar, G., Mather, A. E., Fredes, V., and Riquelme, R.: Tributary-junction alluvial fan response to an ENSO rainfall event in the El Huasco watershed, northern Chile, *Progress in Physical Geography: Earth and Environment*, p. 0309133319898994, 2020.
- Calvo, B. and Savi, F.: A real-world application of Monte Carlo procedure for debris flow risk assessment, *Computers & Geosciences*, 35, 967–977, <https://doi.org/10.1016/j.cageo.2008.04.002>, 2009.
- Cesca, M. and D’Agostino, V.: Comparison between FLO-2D and RAMMS in debris-flow modelling: a case study in the Dolomites, in: *Monitoring, Simulation, Prevention and Remediation of Dense Debris Flows II*, vol. I of *WIT Transactions on Engineering Sciences*, pp. 197–206, WIT Press, Southampton, UK, <https://doi.org/10.2495/DEB080201>, 2008.
- Chang, C.-W., Lin, P.-S., and Tsai, C.-L.: Estimation of sediment volume of debris flow caused by extreme rainfall in Taiwan, *Engineering Geology*, 123, 83–90, <https://doi.org/10.1016/j.enggeo.2011.07.004>, 2011.
- Chow, C., Ramirez, J., and Keiler, M.: Application of Sensitivity Analysis for Process Model Calibration of Natural Hazards, *Geosciences*, 8, 218, <https://doi.org/10.3390/geosciences8060218>, 2018.
- Coussot, P. and Meunier, M.: Recognition, classification and mechanical description of debris flows, *Earth-Science Reviews*, 40, 209–227, [https://doi.org/10.1016/0012-8252\(95\)00065-8](https://doi.org/10.1016/0012-8252(95)00065-8), 1996.
- D’Agostino, V. and Tecca, P. R.: Some considerations on the application of the FLO-2D model for debris flow hazard assessment, in: *Monitoring, Simulation, Prevention and Remediation of Dense and Debris Flows*, vol. 1 of *WIT Transactions on Ecology and the Environment*, Vol 90, pp. 159–170, WIT Press, Southampton, UK, <https://doi.org/10.2495/DEB060161>, 2006.
- Frey, H., Huggel, C., Bühler, Y., Buis, D., Burga, M. D., Choquevilca, W., Fernandez, F., García Hernández, J., Giráldez, C., Loarte, E., Masias, P., Portocarrero, C., Vicuña, L., and Walser, M.: A robust debris-flow and GLOF risk management strategy for a data-scarce catchment in Santa Teresa, Peru, *Landslides*, 13, 1493–1507, <https://doi.org/10.1007/s10346-015-0669-z>, 2016.
- Gupta, H. V. and Razavi, S.: Revisiting the Basis of Sensitivity Analysis for Dynamical Earth System Models, *Water Resources Research*, 100, 1628–1633, <https://doi.org/10.1029/2018WR022668>, 2018.
- Hilker, N., Badoux, A., and Hegg, C.: The Swiss flood and landslide damage database 1972–2007, *Natural Hazards and Earth System Sciences*, 9, 913–925, <https://doi.org/10.5194/nhess-9-913-2009>, 2009.
- Hungr, O.: A model for the runout analysis of rapid flow slides, debris flows, and avalanches, *Canadian Geotechnical Journal*, 32, 610–623, 1995.
- Hürlimann, M., Copons, R., and Altimir, J.: Detailed debris flow hazard assessment in Andorra: A multidisciplinary approach, *Geomorphology*, 78, 359–372, <https://doi.org/10.1016/j.geomorph.2006.02.003>, 2006.



- Iverson, R.: The debris-flow rheology myth, *Debris-flow hazards Mitigation: Mechanics, Prediction, and Assessment*, Millpress, Rotterdam, 2003.
- Iverson, R. M., Reid, M. E., and LaHusen, R. G.: Debris-flow mobilization from landslides, *Annual Review of Earth and Planetary Sciences*, 25, 85–138, <https://doi.org/10.1146/annurev.earth.25.1.85>, 1997.
- Johnson, B. C., Campbell, C. S., and Melosh, H. J.: The reduction of friction in long runout landslides as an emergent phenomenon, *Journal of Geophysical Research: Earth Surface*, 121, 881–889, 2016.
- 360 Lin, P.-S., Lee, J., and Chang, C.: An application of the FLO-2D model to debris-flows simulation-A case study of Song-Her district in Taiwan, *Italian Journal of Engineering Geology and Environment*, 3, 947–956, <https://doi.org/10.4408/IJEGE.2011-03.B-103>, 2011.
- Lucà, F., D'Ambrosio, D., Robustelli, G., Rongo, R., and Spataro, W.: Integrating geomorphology, statistic and numerical simulations for landslide invasion hazard scenarios mapping: An example in the Sorrento Peninsula (Italy), *Computers & Geosciences*, 67, 163–172, <https://doi.org/10.1016/j.cageo.2014.01.006>, 2014.
- 365 Mendoza, P. A., Clark, M. P., Barlage, M., Rajagopalan, B., Samaniego, L., Abramowitz, G., and Gupta, H.: Are we unnecessarily constraining the agility of complex process-based models?, *Water Resources Research*, 51, 716–728, 2015.
- Montserrat, S., Tamburrino, A., Roche, O., Niño, Y., and Ihle, C.: Enhanced run-out of dam-break granular flows caused by initial fluidization and initial material expansion, *Granular Matter*, 18, 11, 2016.
- Naef, D., Rickenmann, D., Rutschmann, P., and McArdeil, B. W.: Comparison of flow resistance relations for debris flows using a one-
370 dimensional finite element simulation model, *Natural Hazards and Earth System Science*, 6, 155–165, <https://doi.org/10.5194/nhess-6-155-2006>, 2006.
- Nash, J. E. and Sutcliffe, J. V.: River flow forecasting through conceptual models part I—A discussion of principles, *Journal of hydrology*, 10, 282–290, 1970.
- O'Brien, James S and Julien, Pierre Y and Fullerton, W.: Two-dimensional water flood and mudflow simulation, *Journal of hydraulic engineering*, 119, 679–683, 1993.
- 375 O'Brien, Jim S and Julien, P. Y.: Laboratory analysis of mudflow properties, *Journal of hydraulic engineering*, 114, 877–887, 1988.
- Olsson, A., Sandberg, G., and Dahlblom, O.: On Latin hypercube sampling for structural reliability analysis, *Structural Safety*, 25, 47–68, [https://doi.org/10.1016/S0167-4730\(02\)00039-5](https://doi.org/10.1016/S0167-4730(02)00039-5), 2003.
- Olsson, A. M. and Sandberg, G. E.: Latin hypercube sampling for stochastic finite element analysis, *Journal of Engineering Mechanics*, 128,
380 121–125, [https://doi.org/10.1061/\(ASCE\)0733-9399\(2002\)128:1\(121\)](https://doi.org/10.1061/(ASCE)0733-9399(2002)128:1(121)), 2002.
- Ortega, C., Vargas, G., Rojas, M., Rutllant, J. A., Muñoz, P., Lange, C. B., Pantoja, S., Dezileau, L., and Ortlieb, L.: Extreme ENSO-driven torrential rainfalls at the southern edge of the Atacama Desert during the Late Holocene and their projection into the 21st century, *Global and Planetary Change*, 175, 226–237, 2019.
- O'Brien, J. and Garcia, R.: FLO-2D Reference manual, Available from: www.flo-2d.com, 2009.
- 385 Pianosi, F., Beven, K., Freer, J., Hall, J. W., Rougier, J., Stephenson, D. B., and Wagener, T.: Sensitivity analysis of environmental models: A systematic review with practical workflow, *Environmental Modelling & Software*, 79, 214–232, <https://doi.org/10.1016/j.envsoft.2016.02.008>, 2016.
- Quan Luna, B., Blahut, J., van Westen, C. J., Sterlacchini, S., van Asch, T. W. J., and Akbas, S. O.: The application of numerical debris flow modelling for the generation of physical vulnerability curves, *Natural Hazards and Earth System Science*, 11, 2047–2060,
390 <https://doi.org/10.5194/nhess-11-2047-2011>, 2011.



- Rakovec, O., Hill, M. C., Clark, M. P., Weerts, A. H., Teuling, A. J., and Uijlenhoet, R.: Distributed Evaluation of Local Sensitivity Analysis (DELSA), with application to hydrologic models, *Water Resources Research*, 50, 409–426, <https://doi.org/10.1002/2013WR014063>, 2014.
- Razavi, S. and Gupta, H. V.: What do we mean by sensitivity analysis? The need for comprehensive characterization of “global” sensitivity in Earth and Environmental systems models, *Water Resources Research*, 51, 3070–3092, 2015.
- 395 Rickenmann, D., Laigle, D., McArdell, B. W., and Hübl, J.: Comparison of 2D debris-flow simulation models with field events, *Computational Geosciences*, 10, 241–264, <https://doi.org/10.1007/s10596-005-9021-3>, 2006.
- Servicio Nacional de Geología y Minería: Principales desastres ocurridos desde 1980, Ministerio de Chile, p. 45, 2017.
- Sosio, R., Crosta, G. B., and Frattini, P.: Field observations, rheological testing and numerical modelling of a debris-flow event, *Earth Surface Processes and Landforms*, 32, 290–306, <https://doi.org/10.1002/esp.1391>, 2007.
- 400 Takahashi, T.: Debris Flow, *Annual Review of Fluid Mechanics*, 13, 57–77, <https://doi.org/10.1146/annurev.fl.13.010181.000421>, 1981.
- Teegavarapu, R., TUFFAIL, M., and Ormsbee, L.: Optimal function forms for spatial interpolation of precipitation data, *Environmental Informatics Archives*, 4, 343–353, 2006.
- Zegers, Gerardo, G. A. M. S.: 2D modeling of debris flows. Application to the Quebrada La Mesilla, Huasco Province (In Spanish), in: XXIII Chilean Conference on Hydraulic Engineering, Chile, October., 2017.